

PHILIPS


CoreLine tempo large

BVP130





		Flux (lm)	Power (W)	Beam		
912300023660	BVP130 LED260/740 A	26000	243	Asymmetric	0.15	7.5
912300023661	BVP130 LED210/740 A	21000	178			
912300023662	BVP130 LED160/740 A	16000	139			
912300023663	BVP130 LED260/740 S	26000	243	Symmetric		
912300023664	BVP130 LED210/740 S	21000	178			
912300023665	BVP130 LED160/740 S	16000	139			

Dimensions in mm

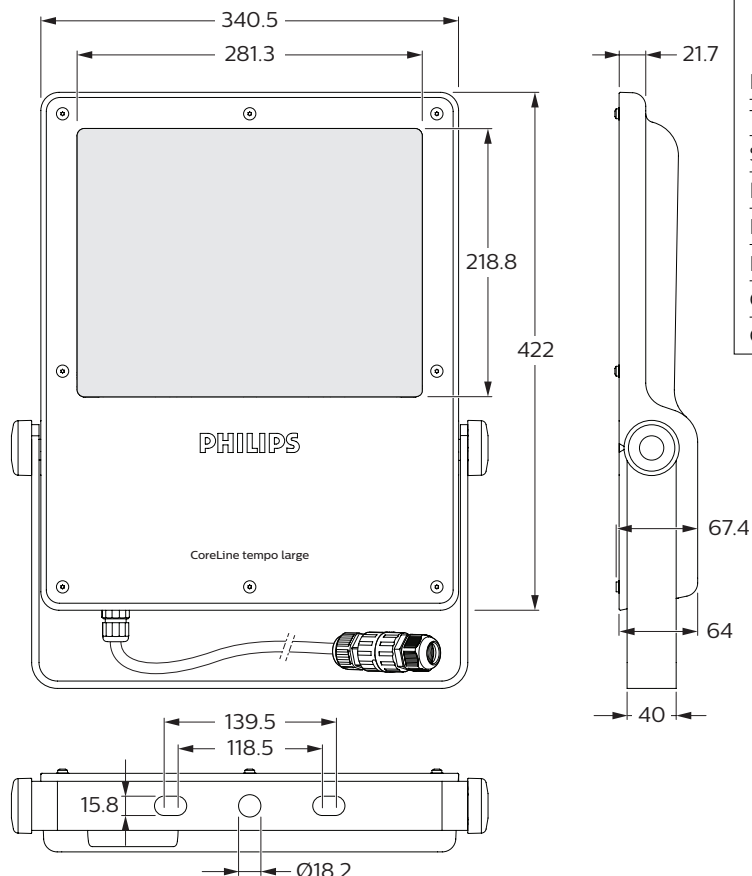


	912300023660	912300023662
	912300023661	912300023665
	912300023663	
	912300023664	
I _{max} (A)	53	53
T _{ref} (μs)	300	300
Surge protection (kV)	6	6
MCB	No. max. luminaires to be connected	
B-10 A	2	4
B-16 A	4	8
C-10 A	4	8
C-16 A	6	13

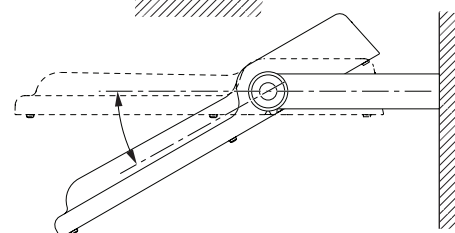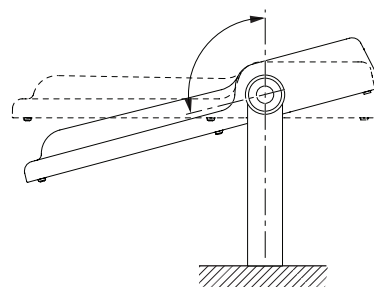




Install the luminaire according to the national regulations.

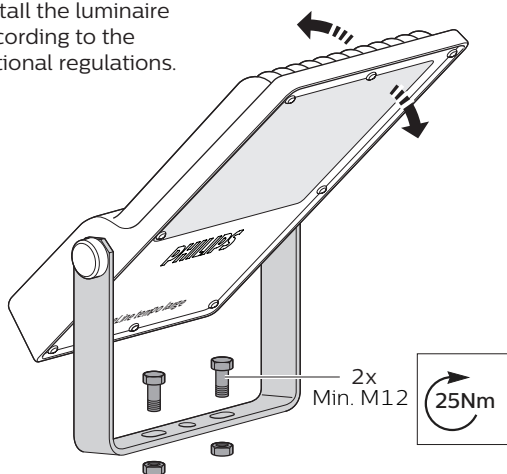


1a


In case of using only the central hole fixation and if the luminaire is higher >3 m, the use of 2nd fixing security system is mandatory.

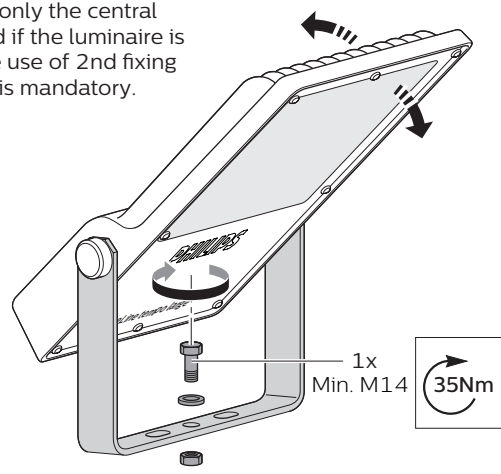


1b

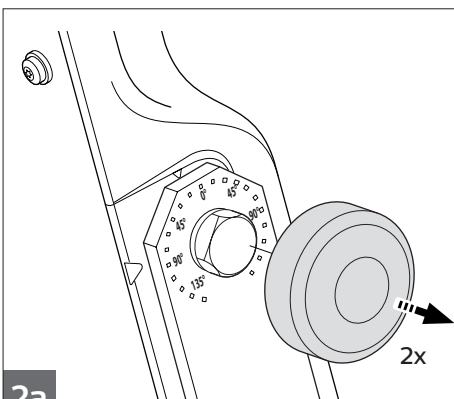

2a

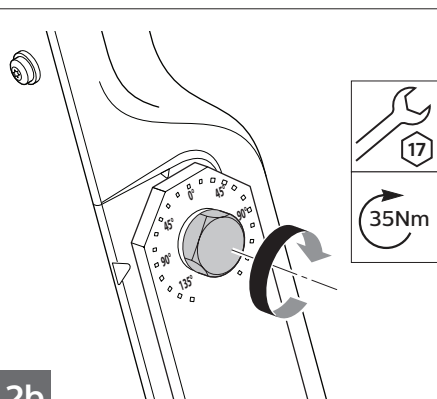




2b

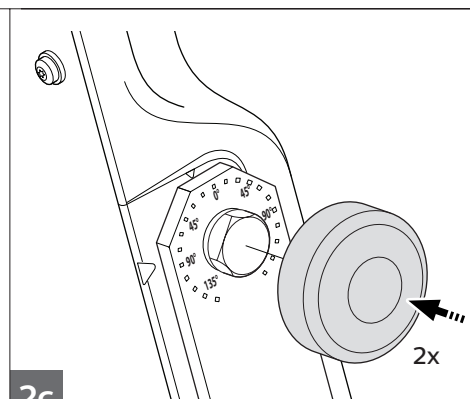


2c

3a

PSU



Min. 3x1,0 mm²
Max. 3x2,5 mm²
Ø 7-Ø 12 mm

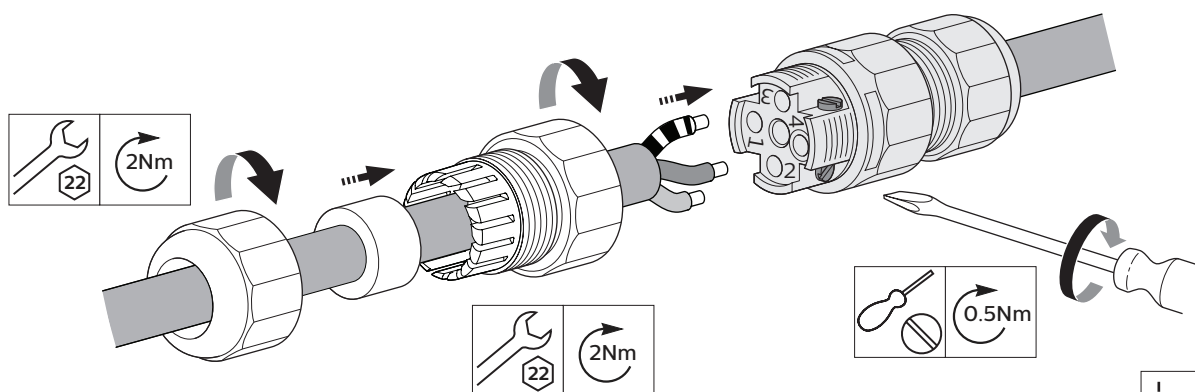


3b







glass maintenance instruction.




The luminaire power should be switched off before opening.

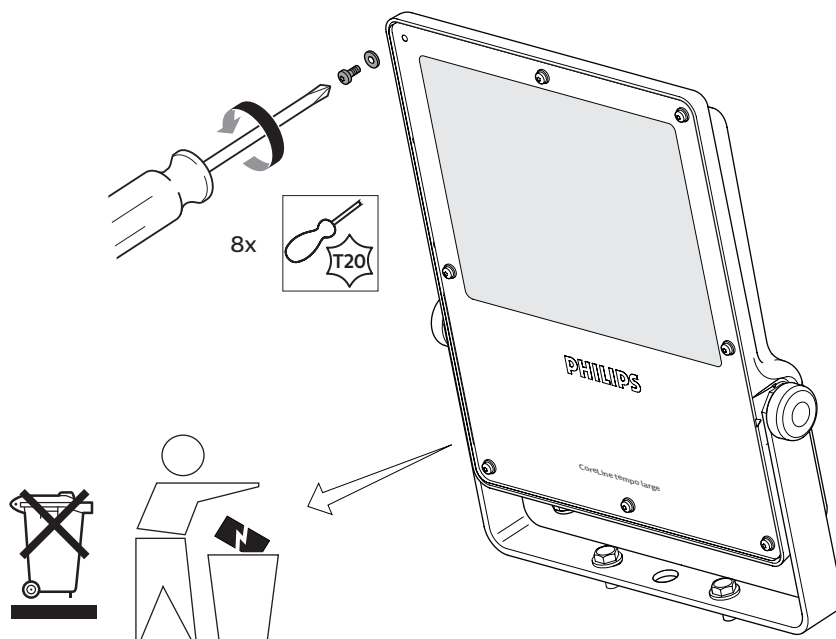

4a

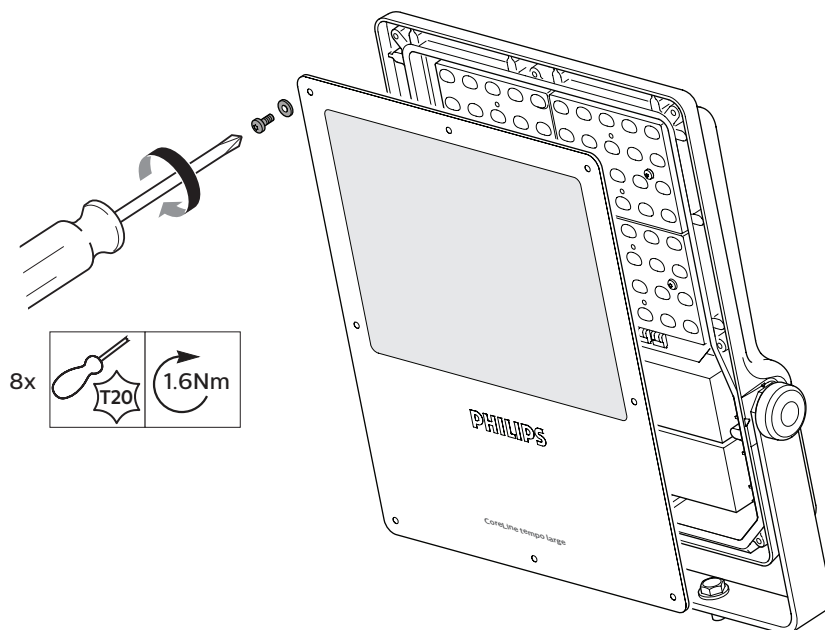

4b

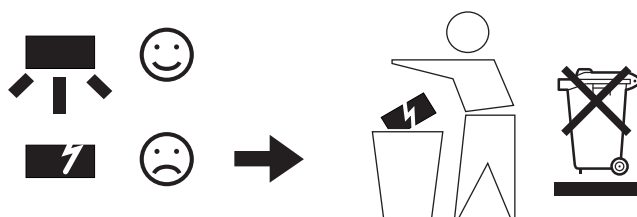

- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- The luminaire shall be installed or maintained by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Outdoor use only.



© 2016 Philips Lighting Holding B.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Philips Lighting Holding B.V.
The Netherlands