

XENON SHORT ARC LAMPS

UXL


- 300 - 1000 Watts
- Searchlight
- Followspot
- Projection

Please see Safety and Handling Instructions on page 82.




Watts	Ushio Ordering Code	Ushio Lamp Description	Rated Amps	Current Control Range A	Volts V	Forced Air Cooling m/sec	Arc Gap	Diameter mm				Length mm			Avg Life h
								(D1) max	(D2)	(D3)	(D4)	(L1)	(L2)	(L3)	
Xenon Short Arc															
300	5000343	UXL-300D-0*	15	14-16	20	—	2.6	25	13	19	M5P0.9	175	150	65	1000
300	5000346	UXL-302-0	15	8-15	20	—	2.6	25	13	NO 10-32 UNF	—	174	150	85	900
350	5000350	UXL-351E-0	16	15-17	22	3-6	2.9	22	13	—	M8	133	120	66.5	1000
500	5000360	UXL-500D-0*	25	17-25	20	4-6	4.0	29	20	M8P1.25	M8P1.25	234	204	95	1500(V) / 1200(H)
500	5000362	UXL-502HS-0	31	21-31	14	7-8	0.9	30	15	4	—	148	135	65	1200
550	5000368	UXL-553	25	17-25	22	7-8	3.1	30	15	M6P1.0	—	161	135	65	1500
1000	5002060	UXL-10S*	50	30-55	20	4-6	4.2	40	25	11	5/16-18 UNC	245	214	98.5	—
1000	5002061	UXL-16S	65	45-70	22	4-6	4.0	46.5	25	11	5/16-18 UNC	245	214	98.5	—
1000	5001075	UXL-10SB	50	30-55	20	4-6	4.2	40	25	11	5/16-18 UNC	245	214	98.5	1500
1000	5000316	UXL-1000D-0*	45	32-47	22	—	5.0	40	25	M10 P1.25	M8 P1.25	315	275	125	1500

* Special Order Item




UXL-300D-0

Burn Position: Vertical $\pm 15^\circ$




UXL-302-0

Burn Position: Vertical $\pm 30^\circ$




UXL-500D-0 / UXL-1000D-0

Burn Position:
Horizontal $\pm 15^\circ$ Vertical $\pm 15^\circ$

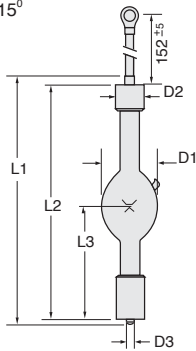


UXL-502HS-0

Burn Position: Vertical $\pm 15^\circ$

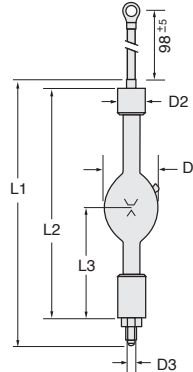


UXL-553

Burn Position:
Horizontal $\pm 15^\circ$ Vertical $\pm 15^\circ$




UXL-351E-0

Burn Position: Horizontal $\pm 15^\circ$



UXL-10S / UXL-16S

Burn Position: Horizontal $\pm 15^\circ$



UXL-10SB / UXL-16SB

Burn Position: Horizontal $\pm 15^\circ$ Vertical $\pm 15^\circ$