



MASTER MHN-LA

MASTER MHN-LA 2000W/842 400V XWH

Compact quartz metal halide lamps with double-pinch

Product data

General Information					
Cap-Base	X528 [X528]				
Bulb Shape	TD40 [TD 40mm]				
Operating Position	P5 [Parallel +/-5D or Horizontal(HOR)]				
Life To 5% Failures (Nom)	4500 h				
Life To 10% Failures (Nom)	6000 h				
Life To 20% Failures (Nom)	8500 h				
Life To 50% Failures (Nom)	13000 h				
Light Technical					
Color Code	842 [CCT of 4200K]				
Luminous Flux (Rated) (Min)	200000 lm				
Luminous Flux (Rated) (Nom)	220000 lm				
Color Designation	Cool White (CW)				
Lumen Maintenance 1000 h (Nom)	94 %				
Lumen Maintenance 10000 h (Nom)	63 %				
Lumen Maintenance 2000 h (Nom)	89 %				
Lumen Maintenance 5000 h (Nom)	76 %				
Chromaticity Coordinate X (Nom)	370				
Chromaticity Coordinate Y (Nom)	370				
Correlated Color Temperature (Nom)	4200 K				
Luminous Efficacy (rated) (Nom)	108 lm/W				
Color Rendering Index (Nom)	72				

Operating and Electrical		
Lamp supply voltage	400 V [400]	
Power (Rated) (Nom)	2040.0 W	
Lamp Current Run-Up (Max)	15 A	
Lamp Current (EM) (Nom)	9.6 A	
Ignition Supply Voltage (Min)	342 V	
Voltage (Max)	245 V	
Voltage (Min)	220 V	
Voltage (Nom)	235 V	
Controls and Dimming		
Dimmable	No	
Mechanical and Housing		
Bulb Finish	Clear	
Cap-Base Information	Cable	
Approval and Application		
Energy Efficiency Label (EEL)	A+	
Mercury (Hg) Content (Nom)	185 mg	
Energy Consumption kWh/1000 h	2244 kWh	
UV		
Specific Eff. Radiant Power	280 mW/klm	

Datasheet, 2017, March 1 data subject to change

MASTER MHN-LA


Luminaire Design Requirements	
Bulb Temperature (Max)	920 °C
Pinch Temperature (Max)	350 °C
Product Data	
Full product code	871150020074700
Order product name	MASTER MHN-LA 2000W/842 400V XWH
EAN/UPC - Product	8718291548201

Order code	928071305130
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	928071305130
Net Weight (Piece)	172.000 g
ILCOS Code	MN-2000-E-K-/H

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

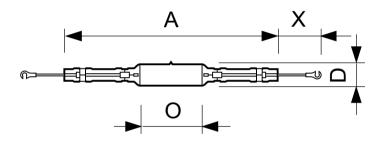

Product	D	0	X	Α
MASTER MHN-LA 2000W/842 400V XWH	40 mm	108 mm	58 mm	353 mm

MHN-LA 2000W/842 400V XWH

Photometric data

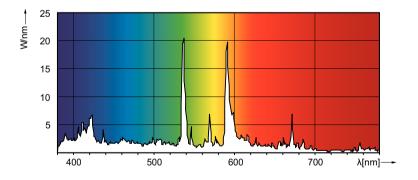

MASTER MHN-LA

