

MSR Gold™ FastFit

MSR Gold™ 700 FastFit 1CT/4



All lamps burn out eventually, but when this happens with single ended MSR Gold™ FastFit, it is replaced in seconds – thanks to the specially designed lamp base and lamp holder. This lamp provides a high beam intensity of pure, white light for a truly illuminating performance, while the gold-plated caps provide superior heat protection and prevent premature failure. P3 technology allows use in any position and at higher temperatures, further extending lamp life and consistency of high-quality light output. Also, because the FastFit design is applied to Philips Halogen lamps, switching between lamp technologies can be done quickly and easily. The Philips MSR Gold™ 1200 FastFit can be operated in a lamp wattage range between 800W and 1400W.

Product data

• General Information

Cap-Base	PGJX50
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Entertainment
Life To 50% Failures (Nom)	750 h
System Description	FastFit

• Light Technical

Luminous Flux (Min)	45500 lm
Luminous Flux (Nom)	50000 lm
Chromaticity Coordinate X (Nom)	327
Chromaticity Coordinate Y (Nom)	336
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (rated) (Nom)	71 lm/W
Color Rendering Index (Nom)	80

• Operating and Electrical

Power (Rated) (Nom)	700 W
Lamp Current (Nom)	10.2 A
Ignition Supply Voltage (Min)	198 V

• Controls and Dimming

Dimmable	Yes
----------	-----

• Mechanical and Housing

Cap-Base Information	PGJX50
----------------------	--------

• Luminaire Design Requirements

Bulb Temperature (Max)	950 °C
Pinch Temperature (Max)	500 °C

• Product Data

Full product code	871829122119700
Order product name	MSR Gold™ 700 FastFit 1CT/4
EAN/UPC - Product	8718291221197
Order code	928106005115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	928106005115
Net Weight (Piece)	0.100 kg


PHILIPS

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and

remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

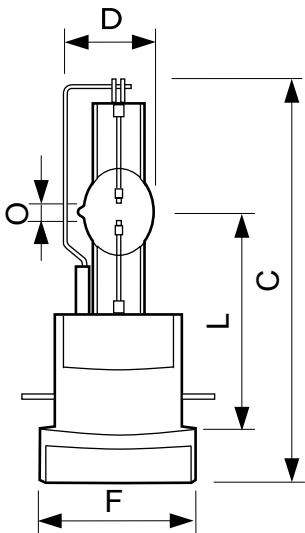


MSR Gold™ 700(2), 1200

MSR GOLD 700 FastFit

Product	D	O	L	L	L	C	F
MSR Gold™ 700 FastFit 1CT/4	23.2 mm	3.8 mm	64 mm	66 mm	65 mm	112 mm	50 mm



Photometric data

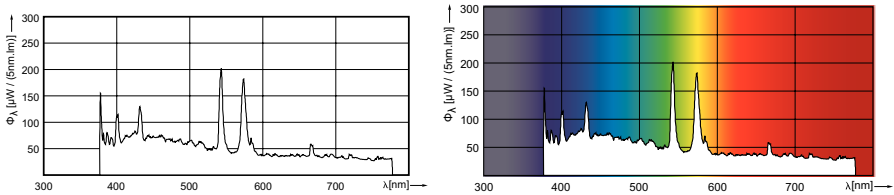



© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, May 28
data subject to change