

## NAV-T 400 W SUPER 6Y

VIALOX NAV-T SUPER 6Y | High-pressure sodium vapor lamps for open and enclosed luminaires



### Areas of application

- Streets
- Outdoor lighting
- Industrial installations
- Suitable for use in open and enclosed luminaires
- Outdoor applications only in suitable luminaires

### Product benefits

- Very long lifetime
- Very high luminous efficacy
- Up to 50 % longer lifetime than lamps of NAV SUPER 4Y family
- Very good luminous flux maintenance throughout the life of the lamp
- Energy savings of up to 50 % when replacing inefficient mercury vapor lamps (HQL)
- Optimum energy efficiency on POWERTRONIC PTo 3DIM ECGs
- Dimmable on conventional control gears and electronic control gears

### Product features

- Lamp survival factor: 95 % after 24,000 h burning time
- Very long average lifetime: up to 48,000 hours
- Lamp maintenance factor:  $\geq 80$  % after 24,000 h burning time (according to DIN 13201)
- Extended service lifetime: 6 years (at approx. 11 h/day)
- ErP compliant according to EU Regulation 245/2009



Technical data

Electrical data


Nominal wattage	400.00 W
Rated wattage	400.00 W
Lamp current	4.52 A
Nominal voltage	100 V
Ignition voltage	3.3 / 5.0 kVp <sup>1)</sup>
Rated lamp efficacy (standard condition)	141 lm/W
Rated luminous flux	56500 lm

<sup>1)</sup> Minimum / Maximum

Photometrical data

Color rendering index Ra	≤25
Color temperature	2000 K
Rated LLMF at 2,000 h	0.98
Rated LLMF at 4,000 h	0.97
Rated LLMF at 6,000 h	0.96
Rated LLMF at 8,000 h	0.95
Rated LLMF at 12,000 h	0.94
Rated LLMF at 16,000 h	0.94
Rated LLMF at 20,000 h	0.94

Dimensions & weight



Diameter	47.0 mm
Length	285.0 mm
Light center length (LCL)	175.0 mm
Product weight	174.00 g

## Product datasheet

### Temperatures & operating conditions

Maximum permitted outer bulb temperature	400 °C
Maximum permitted base edge temperature	250 °C

### Lifespan

Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.98
Rated lamp survival factor at 8,000 h	0.98
Rated lamp survival factor at 12,000 h	0.97
Rated lamp survival factor at 16,000 h	0.96
Rated lamp survival factor at 20,000 h	0.96
Lifespan B50	48000 h
Lifespan B10	28000 h
Lifespan B5	24000 h
Operation mode LLMF/LSF	50 Hz

### Additional product data

Base (standard designation)	E40
Product remark	Important: Before replacing for NAV Standard lamps in existing installations, check that the igniters are suitable
Design / version	Clear
System guarantee level	3 (2/5)
Lamp mercury content	24.0 mg <sup>1)</sup>

<sup>1)</sup> Maximum

### Capabilities

Dimmable	Yes
Burning position	Any
Enclosed luminaire required	No

### Certificates & standards


Energy efficiency class	A++
Energy consumption	440 kWh/1000h

### Country specific categorizations

ILCOS	ST-400-H/E/SL-E40-47/285
-------	--------------------------

Product datasheet

Light Distribution

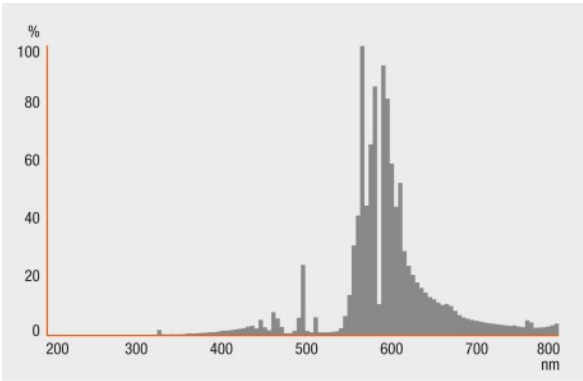

Spectral power distribution



Guarantee

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899047143	NAV-T 400 W SUPER 6Y	Shipping carton box 12	266 mm x 216 mm x 342 mm	19.65 dm <sup>3</sup>	2754.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## Product datasheet

---

### References / Links

For more information on the system guarantee and the terms and conditions of the guarantee visit

▶ [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee)

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.