

# MASTER PL-C 2 Pin

## MASTER PL-C 26W/830/2P 1CT

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

## Product data

#### • General Characteristics

G24d-3 2P 6500 hr
10000 h
99 %
98 %
92 %
78 %

# • Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering	83 Ra8
Index	
Color Designation	Warm White
(text)	
Color Temperature	3000 K
Luminous Flux EM	1800 Lm
25°C, Rated	
Luminous Flux EM	1800 Lm
25°C, Nominal	
Lum Efficacy Rated	68 Lm/W
EM 25°C	
LLMF EM 2000h	92 %
Rated	
LLMF EM 4000h	87 %
Rated	
LLMF EM 6000h	84 %
Rated	

LLMF EM 8000h	81 %
Rated	
Design Temperature	28 C
Chromaticity Coor-	440 -
dinate X	
Chromaticity Coor-	403 -
dinate Y	

## • Electrical Characteristics

Lamp Wattage	26 W
Lamp Wattage EM	26 W
25°C, Nominal	
Lamp Wattage EM	26.5 W
25°C, Rated	
Lamp Voltage EM	100 V
25°C	
Lamp Current EM	0.335 A
25°C	
Dimmable	No

#### • Environmental Characteristics

Energy Efficiency	В
Label (EEL)	
Mercury (Hg)	1.4 mg
Content	
Energy consumption	32 kW
kWh/1000h	

### Product Dimensions

Base Face to Base	130./ (max) mm
Face A	
Insertion Length B	149.0 (max) mm
Overall Length C	171.4 (max) mm
Diameter D	27.1 (max) mm





# MASTER PL-C 2 Pin

Diameter D1 27.1 (max) mm

• Product Data

Order code 927906183040 Full product code 927906183040

Full product name MASTER PL-C 26W/830/2P 1CT Order product name MASTER PL-C 26W/830/2P 1CT/

5X10CC

Pieces per pack 1
Packing configuration 5X10CC
Packs per outerbox 50

Bar code on pack - 8711500620989

EAN1

Bar code on inter- 8711500621320 mediate packing -

EAN2

Bar code on 8711500715920

outerbox - EAN3

Logistic code(s) - 927906183040

12NC

ILCOS code FSQ-26/30/1B-I-G24d=3


Net weight per piece 64.300 gr

# Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position


## • Dimming is not possible

# Dimensional drawing




### MASTER PL-C 26W/830/2P 1CT

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
PL-C 26W/830/2P	130.7	149.0	171.4	27.1	27.1



# MASTER PL-C 2 Pin

## Photometric data

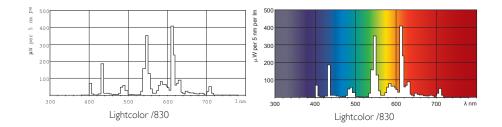



Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.