



MASTER PL-T 4 Pin

MASTER PL-T 18W/827/4P 1CT/5X10BOX

MASTER PL-T is an efficient compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications demanding higher lighting levels. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic gear and is provided with a plug-in/pull-out lamp base.

Product data

• General Information

Cap-Base	GX24Q-2 [GX24q-2]
Life To 50% Failures Preheat (Nom)	13000 h
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	98 %
LSF Preheat 6000 h Rated	97 %
LSF Preheat 8000 h Rated	90 %

• Light Technical

Color Code	827 [CCT of 2700K]
Luminous Flux (Nom)	1200 lm
Luminous Flux (Rated) (Nom)	1200 lm
Color Designation	Incandescent White
Chromaticity Coordinate X (Nom)	455
Chromaticity Coordinate Y (Nom)	417
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Min)	73 lm/W
Color Rendering Index (Nom)	82
LLMF 2000 h Rated	92 %
LLMF 4000 h Rated	88 %
LLMF 6000 h Rated	86 %
LLMF 8000 h Rated	84 %
LLMF 12000 h Rated	81 %

• Operating and Electrical

Power (Rated) (Nom)	16.5 W
Lamp Current (Nom)	0.225 A

• Temperature

Design Temperature (Nom)	28 °C
--------------------------	-------

• Controls and Dimming

Dimmable	Yes
----------	-----

• Mechanical and Housing

Cap-Base Information	4 Pins
----------------------	--------

• Approval and Application

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	20 kWh

• Product Data

Full product code	871150055982170
Order product name	MASTER PL-T 18W/827/4P 1CT/5X10BOX
EAN/UPC - Product	8711500559821
Order code	927914482771

PHILIPS

MASTER PL-T 4 Pin

Numerator - Quantity Per Pack 1
Numerator - Packs per outer box 50


Material Nr. (12NC) 927914482771
Net Weight (Piece) 58.000 g
ILCOS Code FSM-18/27/1B-E-GX24q=2

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes



- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

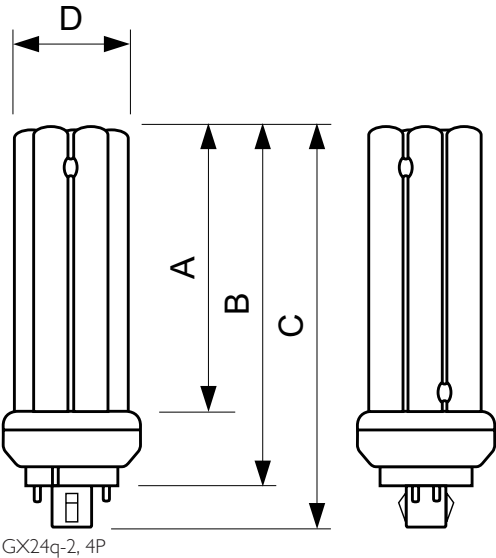


PL-T 18W/827/4P M

Product	D	A	B	C
MASTER PL-T 18W/827/4P 1CT/5X10BOX	96.0 mm	111.7 mm		



Photometric data

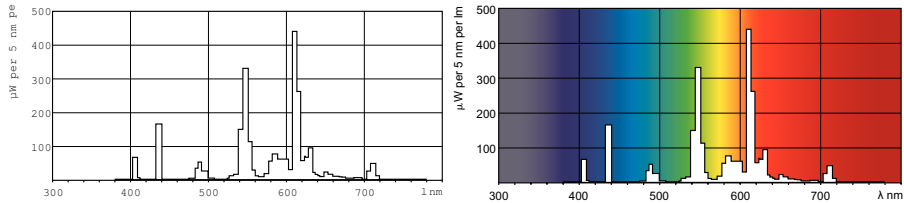



© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, October 10
data subject to change