



MASTER PL-T 4 Pin

MASTER PL-T 32W/840/4P 1CT/5X10BOX

MASTER PL-T is an efficient compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications demanding higher lighting levels. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic gear and is provided with a plug-in/pull-out lamp base.

Product data

General Information		LLMF 12000 h Rated	
Cap-Base	GX24Q-3 [GX24q-3]		81 %
Life to 50% Failures Preheat (Nom)	13000 h	Operating and Electrical	
LSF Preheat 2000 h Rated	99 %	Power (Rated) (Nom)	32.0 W
LSF Preheat 4000 h Rated	98 %	Lamp Current (Nom)	0.320 A
LSF Preheat 6000 h Rated	97 %	Temperature	
LSF Preheat 8000 h Rated	90 %	Design Temperature (Nom)	28 °C
Light Technical		Controls and Dimming	
Color Code	840 [CCT of 4000K]	Dimmable	Yes
Luminous Flux (Nom)	2400 lm	Mechanical and Housing	
Luminous Flux (Rated) (Nom)	2400 lm	Cap-Base Information	4 Pins
Color Designation	Cool White (CW)	Approval and Application	
Correlated Color Temperature (Nom)	4000 K	Energy Efficiency Label (EEL)	A
Luminous Efficacy (Rated) (Min)	75 lm/W	Mercury (Hg) Content (Nom)	1.4 mg
Color Rendering Index (Nom)	82	Energy Consumption kWh/1000 h	35 kWh
LLMF 2000 h Rated	92 %		
LLMF 4000 h Rated	88 %		
LLMF 6000 h Rated	86 %		
LLMF 8000 h Rated	84 %		

MASTER PL-T 4 Pin


Product Data	
Full product code	871150061131470
Order product name	MASTER PL-T 32W/840/4P 1CT/5X10BOX
EAN/UPC - Product	8711500611314
Order code	927914784071
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	50
Material Nr. (12NC)	927914784071
Net Weight (Piece)	70.000 g
ILCOS Code	FSMH-32/40/1B-L/P-GX24q=3

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




PL-T 32W/840/4P M

Product	D (max)	A (max)	B (max)	C (max)
MASTER PL-T 32W/840/4P 1CT/ 5X10BOX	41.0 mm	98.7 mm	123.0 mm	138.7 mm

Photometric data

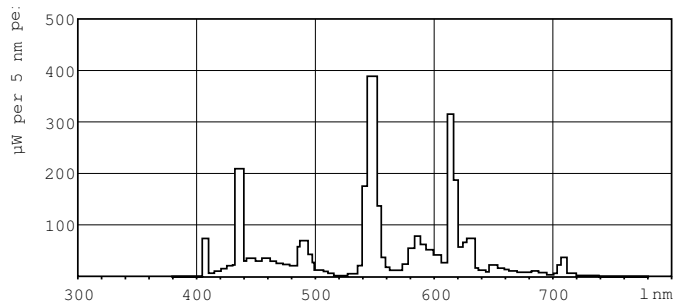



Lightcolor /840

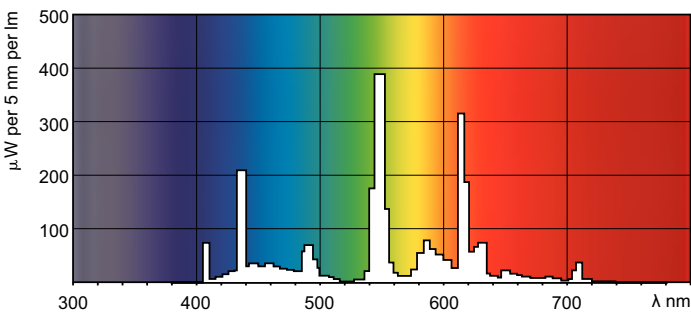


Lightcolor /840

MASTER PL-T 4 Pin

Lifetime

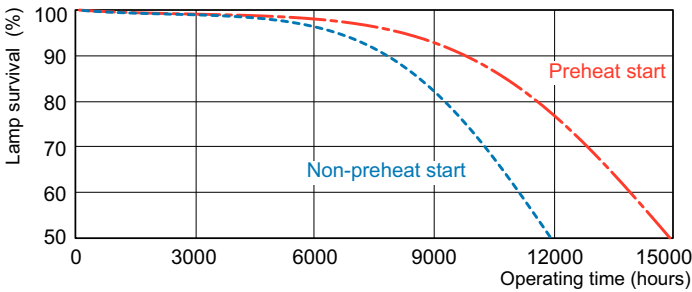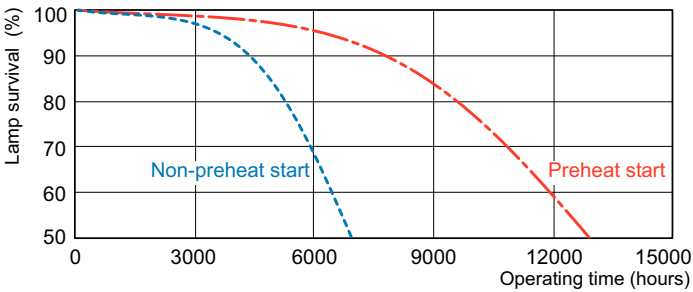

Life Expectancy 3 h cycle

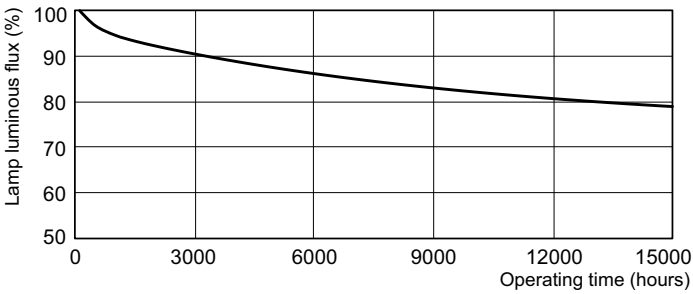

Life Expectancy 12 h cycle

Lumen Maintenance 3 h and 12 h cycle

