



MASTER TL5 High Output



MASTER TL5 HO 24W/840 1SL/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	G5 [G5]
Life to 50% failures preheat (nom.)	30000 h
Features	na [Not Applicable]
System description	High Output (HO)
LSF preheat 2,000 hours rated	99 %
LSF preheat 4,000 hours rated	99 %
LSF preheat 6,000 hours rated	99 %
LSF preheat 8,000 hours rated	99 %
LSF preheat 16,000 hours rated	97 %
LSF preheat 20,000 hours rated	84 %
	Sphere
Light Technical	
Colour Code	840 [CCT of 4,000 K]
Luminous flux (nom.)	1700 lm
Luminous flux (rated) (nom.)	1700 lm
Colour designation	Cool White (CW)
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	87 lm/W

Chromaticity coordinate X (nom.)	0.38
Chromaticity coordinate Y (nom.)	0.38
Correlated Colour Temperature (Nom)	4000 K
Luminous efficacy (rated) (nom.)	76 lm/W
Color rendering index (max.)	85
Colour-rendering index (min.)	80
Colour rendering index (nom.)	82
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

Operating and Electrical


Power (Rated) (Nom)	22.7 W
Lamp current (nom.)	0.295 A

MASTER TL5 High Output

Temperature	
Design temperature (nom.)	35 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-base information	Green Plate
Bulb shape	T5 [16 mm (T5)]
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) content (max.)	1.4 mg
Mercury (Hg) content (nom.)	1.4 mg
Energy consumption kWh/1,000 hours	23 kWh

423555	
Product Data	
Full product code	871150063960855
Order product name	MASTER TL5 HO 24W/840 SLV/40
EAN/UPC – product	8711500639608
Order code	63960855
Local order code	24840
SAP numerator – quantity per pack	1
Numerator – packs per outer box	40
SAP material	927928084055
SAP net weight (piece)	52.000 g
ILCOS code	FDH-24/40/1B-L/P-G5-16/550



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO 24W/840 SLV/40	17 mm	549.0 mm	556.1 mm	553.7 mm	563.2 mm

MASTER TL5 HO 24W/840 SLV/40

Photometric data

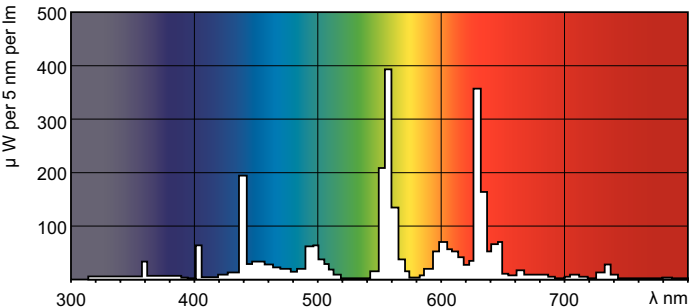
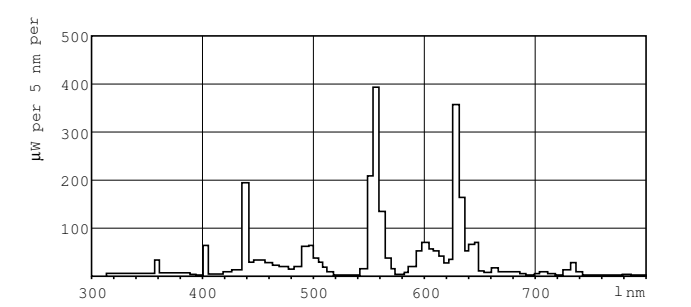


Lightcolour /840


Lightcolour /840

MASTER TL5 High Output

Lifetime

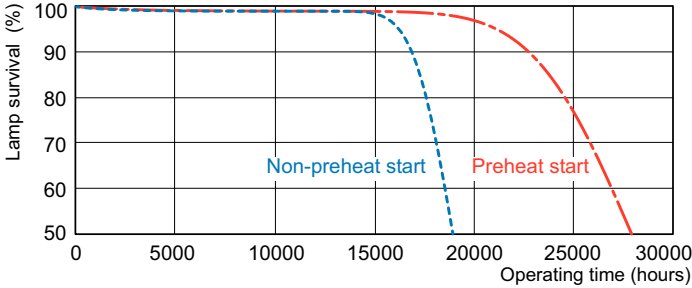

LDLE_TL5-HO8_0001-Life expectancy diagram

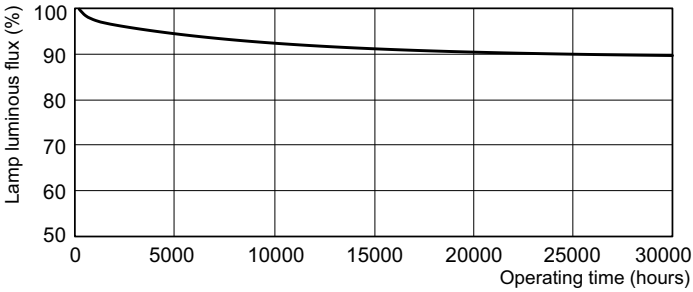

LDLE_TL5-HO8_0002-Life expectancy diagram

LDLM_TL5-HO8_0001-Lumen maintenance diagram

