



MASTER TL5 High Output



MASTER TL5 HO 49W/830 1SL/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information			
Cap base	G5 [G5]	Chromaticity coordinate X (nom.)	0.44
Life to 50% failures preheat (nom.)	30000 h	Chromaticity coordinate Y (nom.)	0.403
Features	na [Not Applicable]	Correlated Colour Temperature (Nom)	3000 K
System description	High Output (HO)	Luminous efficacy (rated) (nom.)	89 lm/W
LSF preheat 2,000 hours rated	99 %	Color rendering index (max.)	85
LSF preheat 4,000 hours rated	99 %	Colour-rendering index (min.)	80
LSF preheat 6,000 hours rated	99 %	Colour rendering index (nom.)	82
LSF preheat 8,000 hours rated	99 %	LLMF 2000 h Rated	96 %
LSF preheat 16,000 hours rated	97 %	LLMF 4000 h Rated	95 %
LSF preheat 20,000 hours rated	84 %	LLMF 6000 h Rated	94 %
	Sphere	LLMF 8000 h Rated	93 %
		LLMF 12000 h Rated	92 %
		LLMF 16000 h Rated	91 %
		LLMF 20000 h Rated	90 %
Light Technical		Operating and Electrical	
Colour Code	830 [CCT of 3,000 K]	Power (Rated) (Nom)	49.3 W
Luminous flux (nom.)	4375 lm	Lamp current (nom.)	0.255 A
Luminous flux (rated) (nom.)	4375 lm		
Colour designation	Warm white (WW)		
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	99 lm/W		

MASTER TL5 High Output

Temperature	
Design temperature (nom.)	35 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-base information	Green Plate
Bulb shape	T5 [16 mm (T5)]
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) content (max.)	1.4 mg
Mercury (Hg) content (nom.)	1.4 mg
Energy consumption kWh/1,000 hours	50 kWh

423546	
Product Data	
Full product code	871150063954755
Order product name	MASTER TL5 HO 49W/830 SLV/40
EAN/UPC – product	8711500639547
Order code	63954755
SAP numerator – quantity per pack	1
Numerator – packs per outer box	40
SAP material	927927583055
SAP net weight (piece)	128.700 g
ILCOS code	FDH-49/30/1B-L/P-G5-16/1450


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO 49W/830 SLV/40	17 mm	1449.0 mm	1456.1 mm	1453.7 mm	1463.2 mm

MASTER TL5 HO 49W/830 SLV/40

Photometric data

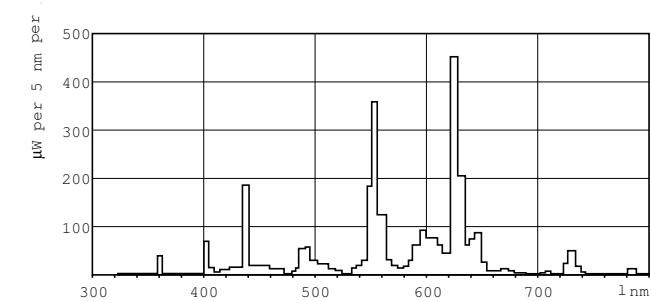



Lightcolour /830

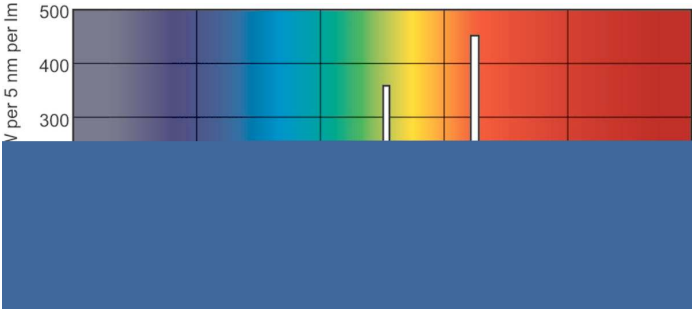


Lightcolour /830

MASTER TL5 High Output

Lifetime

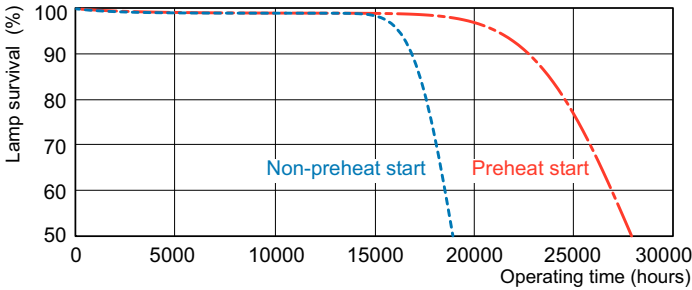

LDLE_TL5-HO8_0001-Life expectancy diagram

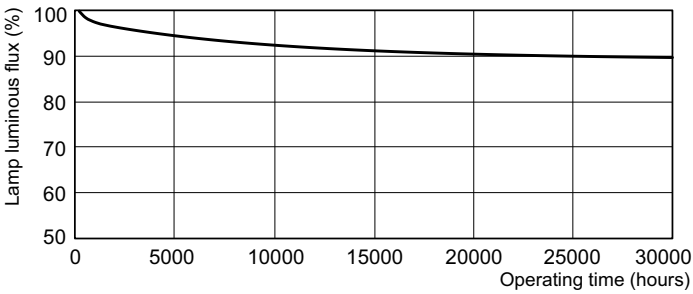

LDLE_TL5-HO8_0002-Life expectancy diagram

LDLM_TL5-HO8_0001-Lumen maintenance diagram

