



MASTER TL5 High Output Eco

MASTER TL5 HO Eco 73=80W/830 UNP/40

This extremely efficient TL5 lamp (tube diameter 16 mm) saves considerable energy by simple lamp-for-lamp replacement. The TL5 HO Eco lamp is optimized for installations requiring high light output and offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

Product data

• General Information

Cap-Base	G5 [G5]
Bulb Shape	T5 [16 mm (T5)]
Life To 50% Failures Preheat (Nom)	30000 h
Features	na [Not Applicable]
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %
LSF Preheat 6000 h Rated	99 %
LSF Preheat 8000 h Rated	99 %
LSF Preheat 16000 h Rated	99 %
LSF Preheat 20000 h Rated	94 %

• Light Technical

Color Code	830 [CCT of 3000K]
Luminous Flux (Nom)	7000 lm
Luminous Flux (Rated) (Nom)	6550 lm
Color Designation	Warm White (WW)
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	95 lm/W
Chromaticity Coordinate X (Nom)	440
Chromaticity Coordinate Y (Nom)	403
Correlated Color Temperature (Nom)	3000 K

Luminous Efficacy (rated) (Nom)	89 lm/W
Color Rendering Index (Max)	85
Color Rendering Index (Min)	80
Color Rendering Index (Nom)	82
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

• Operating and Electrical

Power (Rated) (Nom)	73.3 W
Lamp Current (Nom)	0.550 A

• Temperature

Design Temperature (Nom)	35 °C
--------------------------	-------

• Controls and Dimming

Dimmable	Yes
----------	-----

• Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	1.4 mg

PHILIPS

MASTER TL5 High Output Eco

Energy Consumption 80 kWh
kWh/1000 h

• Product Data

Full product code 872790082596100
Order product name MASTER TL5 HO Eco 73=80W/830
UNP/40
EAN/UPC - Product 8711500880086

Order code 927991883031
Numerator - Quantity Per Pack 1
Numerator - Packs 40
per outer box
Material Nr. (12NC) 927991883031
Net Weight (Piece) 128.700 g
ILCOS Code FDH-73/30/1B-L/P-G5-16/1450

Warnings and Safety


- A reduction in energy consumption is only achieved with current-controlled gear.
- The lamps operate perfectly with power-controlled gear, but in that case the light output can be up to 10% higher.

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

TL5 HO Eco 73=80W/830



Product	D	A	B	B C
MASTER TL5 HO Eco 73=80W/830 UNP/40	1456.1 mm	1453.7 mm	1463.2 mm	

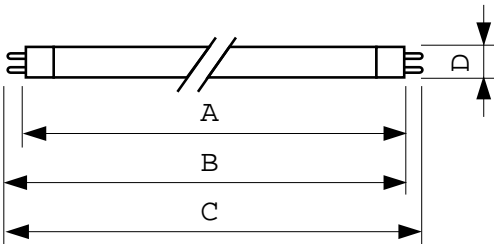

G5, T5



Photometric data

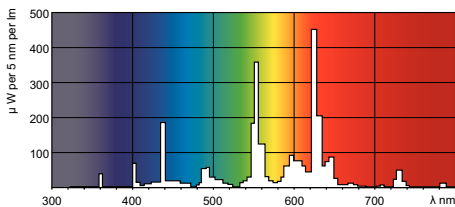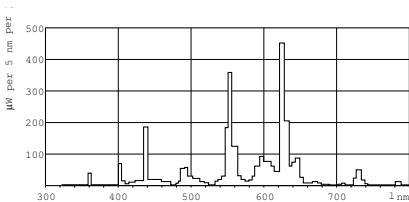



© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, October 10
data subject to change