

## HE ES 32 W/830

LUMILUX T5 HE ES | Tubular fluorescent lamps 16 mm, high efficiency, energy saver, with G5 base



### Areas of application

- Public buildings
- Offices
- Shops
- Supermarkets and department stores
- Industry
- Outdoor applications only in suitable luminaires

### Product benefits

- Up to 10 % energy savings compared to standard T5 HE LUMILUX lamps
- Excellent economy and efficiency
- Pay-back time less than 1 year
- High luminous efficacy

### Product features

- Luminous efficacy: up to 114 lm/W
- Very good lumen maintenance: 90 % throughout the service lifetime of the lamp
- Long average lifetime: up to 24,000 h (with QUICKTRONIC ECG)
- Good color rendering group: 1B ( $R_a$ : 80...89)
- Dimmable



# Product datasheet

## Technical data


### Electrical data

Nominal voltage	184 V
Nominal wattage	32.00 W
Rated lamp efficacy (HF data 25 °C)	98 lm/W
Rated wattage	31.60 W
Rated luminous flux	3100 lm

### Photometrical data

Color rendering index Ra	≥80
Luminous flux at 25 °C	3100 lm
Luminous flux at 35 °C	3650 lm
Light color	830
Color temperature	3000 K
Nominal luminous flux	3100 lm
Light color (designation)	LUMILUX Warm White
Rated LLMF at 2,000 h	0.95
Rated LLMF at 4,000 h	0.93
Rated LLMF at 6,000 h	0.92
Rated LLMF at 8,000 h	0.90
Rated LLMF at 12,000 h	0.90
Rated LLMF at 16,000 h	0.90
Rated LLMF at 20,000 h	0.89

### Dimensions & weight

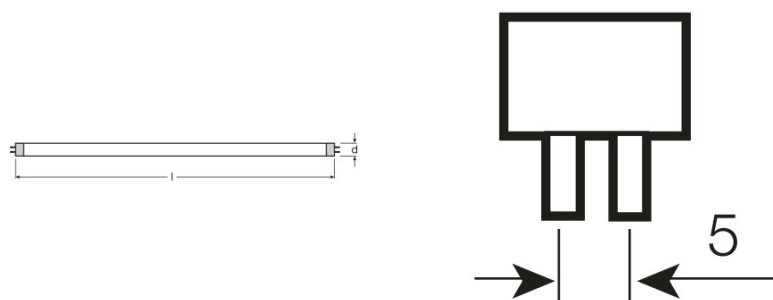

Tube diameter	16 mm
Length	1449 mm
Length with base excl. base pins/connection	1449.00 mm

## Product datasheet

Diameter	16.0 mm
Maximum diameter	16.0 mm

### Temperatures & operating conditions

Rated ambient temp.w.max.luminous flux	35.0 °C
--	---------

### Lifespan

Service life	19000 h <sup>1)</sup>
Lifespan	24000 h <sup>1)</sup>
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.99
Rated lamp survival factor at 16,000 h	0.97
Rated lamp survival factor at 20,000 h	0.85
Operation mode LLMF/LSF	HF
Rated lamp life time	24000 h
Nominal lamp life time	24000 h

<sup>1)</sup> With preheat ECG

### Additional product data

Base (standard designation)	G5
Lamp mercury content	1.9 mg
Appropriate disposal acc. to WEEE	Yes
Product remark	For ECG operation only/Lamp designed for internal luminaire temperatures of 30...40 °C; optimum luminous flux achieved at 35 °C

### Capabilities

Dimmable	Yes
Suitable for indoor	Yes

### Certificates & standards

Energy efficiency class	A+
Energy consumption	35 kWh/1000h

## Light Distribution

---



Spectral power distribution

---

### System guarantee

OSRAM System+ Guarantee in combination with OSRAM ECGs



Guarantee

---

### Safety advice

In case of lamp breakage: [www.osram.com/brokenlamp](http://www.osram.com/brokenlamp)

# Product datasheet



Circuit diagram

Circuit diagram

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321517111	HE ES 32 W/830	Shipping carton box 40	1500 mm x 83 mm x 194 mm	24.15 dm <sup>3</sup>	6258.00 g
4008321957931	HE ES 32 W/830	Shipping carton box 20	1482 mm x 83 mm x 104 mm	12.79 dm <sup>3</sup>	3450.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## References / Links

For more information on the system guarantee and the terms and conditions of the guarantee visit

▶ [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee)

For more information on QUICKTRONIC electronic control gear go to

▶ [www.osram.com/QUICKTRONIC](http://www.osram.com/QUICKTRONIC)

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

## HE ES 32 W/830

LUMILUX T5 HE ES | Tubular fluorescent lamps 16 mm, high efficiency, energy saver, with G5 base

Product name	Product name ECG	EAN	Nominal current	Nominal wattage + Power loss	Luminous flux at 35 °C	Number of lighting outlets
HE ES 32 W/830	QT 1x35 DIM	4008321640376	0.17 A	38.60 W	3150 lm	1
	QT 2x35 DIM	4008321640475	0.34 A	77.30 W	3150 lm	2
	QT-FIT 5 1x14-35	4008321971234	0.15 A	35.00 W	3100 lm	1
	QT-FIT 5 2x14-35	4008321971258	0.32 A	71.00 W	3100 lm	2
	QTi 1x14/24/21/39 GII	4008321383334	0.16 A	36.00 W	3150 lm	1
	QTi 1x28/54/35/49 GII	4008321383358	0.16 A	36.00 W	3150 lm	1
	QTi 1x35/49/80 GII	4008321383372	0.16 A	36.00 W	3150 lm	1
	QTi 2x14/24/21/39 GII	4008321383396	0.31 A	68.00 W	3150 lm	2
	QTi 2x28/54/35/49 GII	4008321383419	0.31 A	68.00 W	3150 lm	2
	QTi 2x35/49/80 GII	4008321658951	0.33 A	70.00 W	3150 lm	2
	QTP5 1x14-35	4008321329035	0.15 A	34.00 W	3100 lm	1
	QTP5 2x14-35	4008321329073	0.30 A	68.00 W	3100 lm	2