Lighting

PHILIPS



MASTERColour CDM MW Eco

MASTERColour CDM-T MW eco 360W/842 E40

Ceramic metal halide lamps with clear tubular or coated ellipsoid outer bulb, tailormade to replace and outperform quartz metal halide lamps on existing gear.

Warnings and Safety

- · For use with control gear designed for high pressure mercury or high-pressure sodium lamps with external ignitor
- A lamp breaking is extremely unlikely to have an impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Warm restart time can be up to 15 minutes; T15 ignitors therefore advised.

Product data

Cap-Base E40 [E40] Power Consumption Operating Position P45 [Parallel +/-45D or Horizontal(HOR)] Voltage (Nom) Flux measurement reference Sphere Voltage (Nom)	361.0 W 123 V 123 V	
Flux measurement reference Sphere Voltage (Nom)	123 V	
Life to 50% Failures (Nom) 30,000 hour(s)		
Controls and Dimming		
Light Technical Dimmable	No	
Color Code 842 [CCT of 4200K]		
Luminous Flux 35,400 lumen Mechanical and Housing	Mechanical and Housing	
Color Designation Cool White (CW) Bulb Finish	Clear	
Chromaticity Coordinate X (Nom) 0.371 Bulb Material	Hard Glass	
Chromaticity Coordinate Y (Nom) 0.366 Bulb Shape	T46 [T 46mm]	
Correlated Color Temperature (Nom) 4200 K		
Luminous Efficacy (rated) (Nom) 98.06 lm/W Approval and Application		
Color rendering index (CRI) 88 Energy Efficiency Class	F	
Mercury (Hg) Content (Max)	48 mg	


A ↑ G

MASTERColour CDM MW Eco

48.0 mg
361 kWh
473317
871869664610600
MASTERColour CDM-T MW eco 360W/842 E40
928070319230


Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928070319230
Full product name	MASTERColour CDM-T MW eco 360W/842 E40
EAN/UPC - Case	8718696646113
EAN/UPC - Product/Case	8718696646106

Dimensional drawing




Product	D	0	L	C (max)
MASTERColour CDM-T MW eco 360W/842 E40	47 mm	11.9 mm	161 mm	257 mm

Photometric data






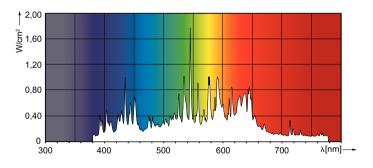

Spectral Power Distribution Colour - MASTERColour CDM-T MW eco 360W/842 E40

MASTERColour CDM MW Eco

Lifetime

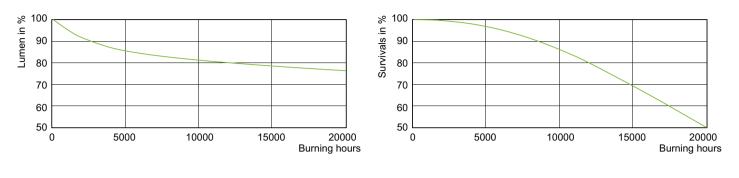

Lumen Maintenance Diagram - MASTERColour CDM-T MW eco 360W/842 E40 Life Expectancy Diagram - MASTERColour CDM-T MW eco 360W/842 E40



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, October 31 - data subject to change