# **PHILIPS** Lighting



## Corepro - LED HID HPL

### TForce Core LED HPL 26W E27 840 FR

Philips TrueForce Core LED HPL lamps are an easy, LED solution with a short payback to replace High Intensity Discharge (HID) lamps. This new generation of LED Core Post-Top lamps brings all the energy-efficiency and long-lifetime benefits of LED to HID replacement, while delivering instant saving for a low initial investment. Furthermore, TrueForce CorePro LED HPL lamps are designed to have the same lamp size and light distribution as their HID alternatives. And thanks to our highpower LED filament technology, you'll never know the difference. Plus, their unique IP65 design means that TrueForce Core LED HPL Post-Top lamps can be used for outdoor, as well as indoor applications.

#### Warnings and Safety

• Installation should always be performed by a qualified electrician or installer. Use the installation guide for instructions.

#### **Product data**

eneral Information		Color Designation	Cool White (CW)
ap-Base	E27 [E27]	Correlated Color Temperature (Nom)	4000 K
Iominal lifetime	25,000 hour(s)	Luminous Efficacy (rated) (Nom)	153 lm/W
vitching Cycle	15,000	Color Consistency	<6
ghting Technology	LED	Color rendering index (CRI)	80
lux measurement reference	Sphere	LLMF At End Of Nominal Lifetime (Nom)	0.7 %
E mark	Yes	Flickering value (PstLM)	1
U RoHS compliant	Yes	Stroboscopic effect value (SVM)	1.6
		Photobiological safety according to EN 62471	RG1
ight Technical			
Color Code	840 [CCT of 4000K]	Operating and Electrical	
Beam Angle (Nom)	300 degree(s)	Line Frequency	50 to 60 Hz
uminous Flux	4,000 lumen	Input Frequency	50 to 60 Hz


A ↑ G

#### **Corepro - LED HID HPL**

Power Consumption	26 W
Lamp Current (Nom)	145 mA
Wattage Equivalent	125 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
Temperature	
Ambient temperature range	-30 to +45 °C
T-Case Maximum (Nom)	54 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	ED90 [ED 90mm]


Approval and Application		
Energy Efficiency Class	D	
Energy Consumption kWh/1000 h	26 kWh	
EPREL Registration Number	403623	
Product Data		
Full product code	871869975035000	
Order product name	TForce Core LED HPL 26W E27 840 FR	
Order code	929002350202	
Numerator - Quantity Per Pack	1	
Numerator - Packs per outer box	6	
Material Nr. (12NC)	929002350202	
Full product name	TForce Core LED HPL 26W E27 840 FR	
EAN/UPC - Case	8718699750367	
EAN/UPC - Product/Case	8718699750350	

#### Dimensional drawing




Product	D	C
TForce Core LED HPL 26W E27 840 FR	90 mm	245 mm

#### Photometric data

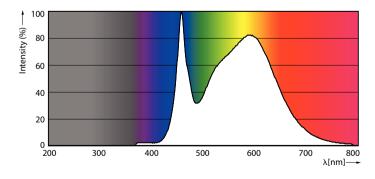


Spectral Power Distribution Colour - TForce Core LED HPL 26W E27 840 FR



Light Distribution Diagram - TForce Core LED HPL 26W E27 840 FR


#### **Corepro - LED HID HPL**

#### Photometric data




General uniform lighting - TForce Core LED HPL 26W E27 840 FR

#### Lifetime

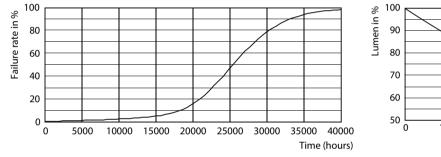

Life Expectancy Diagram - TForce Core LED HPL 26W E27 840 FR



Lumen Maintenance Diagram - TForce Core LED HPL 26W E27 840 FR



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.