



Master Value Decorative LED candles and lusters

MAS VLE LEDCandleD2.5-15WE14 B35GOLDSP G

The new Deco collection (candles and lusters) transforms your home with a perfect blend of (warm) white light and a lean, minimalistic lighting experience. With very long lifetime, up to 90% energy savings, no flickering and an instant full level brightness, you will also enjoy soft and evenly distributed light with that trendy and stylish charm for a welcoming harmony in your space.

Product data

General Information			
Cap-Base	E14 [E14]	Flickering value (PstLM)	1
Nominal lifetime	15,000 hour(s)	Stroboscopic effect value (SVM)	0.4
Switching Cycle	20,000	Photobiological safety according to EN 62471	RG1
Lighting Technology	LED		
CE mark	Yes		
EU RoHS compliant	Yes		
Light Technical		Operating and Electrical	
Color Code	818 [CCT of 1800K]	Line Frequency	50 to 60 Hz
Luminous Flux	136 lumen	Input Frequency	50 to 60 Hz
Color Designation	1800	Power Consumption	2.5 W
Correlated Color Temperature (Nom)	1800 K	Lamp Current (Nom)	14 mA
Luminous Efficacy (rated) (Nom)	54 lm/W	Wattage Equivalent	15 W
Color Consistency	<6	Starting Time (Nom)	0.5 s
Color rendering index (CRI)	80	Warm-up time to 60% light	0.5 s
LLMF At End Of Nominal Lifetime (Nom)	70 %	Power Factor (Fraction)	0.7
		Voltage (Nom)	220-240 V

Master Value Decorative LED candles and lusters



Temperature	
Ambient temperature range	-20 to +45 °C
T-Case Maximum (Nom)	38 °C
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Amber
Bulb Material	Glass
Bulb Shape	B35 [B 35mm]
Approval and Application	
Energy Consumption kWh/1000 h	3 kWh
EyeComfort	Yes

Product Data	
Full product code	871951431603400
Order product name	MAS VLE LEDCandleD2.5-15WE14 B35GOLDSP G
Order code	929002983202
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929002983202
Full product name	MAS VLE LEDCandleD2.5-15WE14 B35GOLDSP G
EAN/UPC - Case	8719514316041
EAN/UPC - Product/Case	8719514316034

Dimensional drawing

Product	D	C
MAS VLE LEDCandleD2.5-15WE14 B35GOLDSP G	36 mm	95 mm

Photometric data

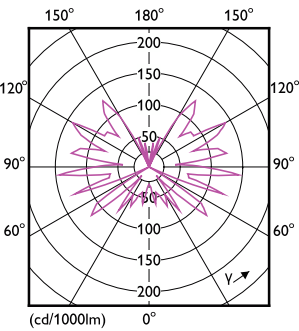


General uniform lighting - MAS VLE LEDCandleD2.5-15WE14 B35GOLDSP G

Light Distribution Diagram - MAS VLE LEDCandleD2.5-15WE14 B35GOLDSP G


Master Value Decorative LED candles and lusters

Photometric data

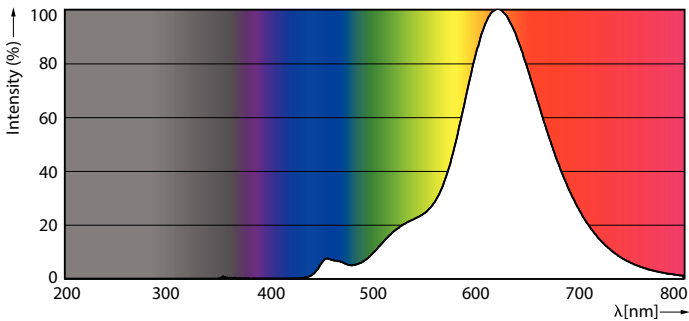

Spectral Power Distribution Colour - MAS VLE LEDCandleD2.5-15WE14 B35GOLDSP G

Lifetime

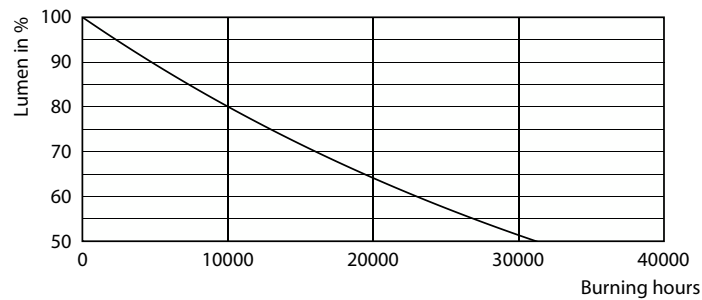

Life Expectancy Diagram - MAS VLE LEDCandleD2.5-15WE14 B35GOLDSP G

Lumen Maintenance Diagram - MAS VLE LEDCandleD2.5-15WE14 B35GOLDSP G

