



CorePro GLASS LED candles and lustres

CoreProLEDCandleND4.3-40WE14 827B35CLGUK

Featuring a classic heritage design, these filament LED candles combine the familiar shapes of classic incandescent bulbs with the benefits of long-lasting LED technology. The LED candle bulb is a very easy choice for people who are looking for a retrofit LED replacement, it provides 90% energy savings compared with conventional lamps. CorePro Glass LED bulbs provide excellent quality of light for stairway lighting. The LED candle bulb offers a lifetime of 15,000 hours to reduce maintenance costs.

Product data

General Information		
Cap base	E14 [E14]	
EU RoHS compliant	Yes	
Nominal lifetime (nom.)	15000 h	
Switching cycle	20,000X	
Light Technical		
Colour Code	827 [CCT of 2,700 K]	
Luminous flux (nom.)	470 lm	
Colour designation	Warm white (WW)	
Correlated Colour Temperature	2700 K	
(Nom)		
Luminous efficacy (rated) (nom.)	109.00 lm/W	
Colour consistency	<6	
Colour rendering index (nom.)	80	
LLMF at end of nominal lifetime	70 %	
(nom.)		
	·	

Operating and Electrical	
Input frequency	50 to 60 Hz
Power (Rated) (Nom)	4.3 W
Lamp current (nom.)	40 mA
Wattage equivalent	40 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.41
Voltage (Nom)	220-240 V
Temperature	
T-Case maximum (nom.)	45 ℃
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Lamp Finish	Clear


Datasheet, 2022, January 13 data subject to change

CorePro GLASS LED candles and lustres

Bulb shape	B35 [B 35mm]
Approval and Application	
Energy Efficiency Class	F
Energy consumption kWh/1,000	5 kWh
hours	
	387402
Product Data	
Full product code	871951434726701

Order product name	CoreProLEDCandleND4.3-40WE14 827B35CLGU	
EAN/UPC – product	8719514347267	
Order code	34726701	
SAP numerator – quantity per pack	1	
Numerator – packs per outer box	10	
SAP material	929001889719	
SAP net weight (piece)	0.014 kg	


Dimensional drawing




CoreProLEDCandleND4.3-40WE14 827B35CLGUK

Product	D	С
CoreProLEDCandleND4.3-40WE14 827B35CLGUK	35 mm	97 mm

Photometric data

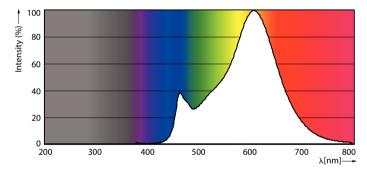






LEDCandle CLA 4.3-40W E14 B35 Clear 827 ND


CorePro GLASS LED candles and lustres


Photometric data



LEDCandle CLA 4.3-40W E14 B35 Clear 827 ND

Lifetime

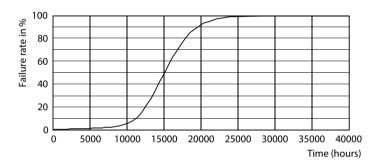



LEDCandle CLA 4.3-40W E14 B35 Clear 827 ND

LEDCandle CLA 4.3-40W E14 B35 Clear 827 ND



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.