

LL217X 80S/840 1x PSD WB 7x1.5

CoreLine Trunking Gen2 is a light-line system that is designed for simplicity. It comes in a choice of lengths, flux packages and beam shapes to suit every project and application. Easy to use and integrate with spots and sensors, CoreLine Trunking Gen2 provides consistent, high-quality lighting with added protection against accidental water ingress. The innovative system is also easy to assemble and install for faster retrofits and refurbishments.

General Information	
Light source replaceable	No
CE mark	Yes
Number of gear units	1 unit
Driver included	Yes
Flammability mark	-
Glow-wire test	Temperature 850 °C, duration 30 s
Warranty period	5 years
Service tag	Yes
Product family code	LL217X [Coreline Trunking Gen2]
Lighting Technology	LED
ENEC mark	ENEC plus mark
EU RoHS compliant	Yes
Value ladder	Value

Application Conditions	
Maximum dim level	1%
Performance ambient temperature Tq	25 °C
Suitable for random switching	Yes (relates to presence/ movement detection and daylight harvesting)
Light Technical	
Luminous Flux	8,000 lumen
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	160 lm/W
Color rendering index (CRI)	>80
Beam angle of light source	120 degree(s)
Light source color	840 neutral white
Optic type	Wide beam
Luminaire light beam spread	84° x 84°

CoreLine Trunking Gen2

Unified glare rating CEN	22
--------------------------	----

Operating and Electrical

Line Frequency	50 to 60 Hz
Input Voltage	220 to 240 V
Initial CLO power consumption	- W
Average CLO power consumption	- W
Inrush current	25.1 A
Inrush time	0.214 ms
Power Consumption	50 W
Power Factor (Fraction)	0.95
Connection	Connection unit 7-pole
Cable	-
Number of products on MCB of 16 A type B	21

Temperature

Ambient temperature range	-20 to +35 °C
---------------------------	---------------

Controls and Dimming

Dimmable	Yes
Driver/power unit/transformer	Power supply unit with DALI interface
Control interface	DALI
Constant light output	No

Mechanical and Housing

Housing Material	Steel
Reflector material	-
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Steel
Housing Color	White RAL9016
Optical cover/lens finish	Frosted
Overall length	1,700 mm
Overall width	80 mm
Overall height	50 mm

Dimensions (Height x Width x Depth)	50 x 80 x 1700 mm
-------------------------------------	-------------------

Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Sustainability rating	-
Protection class IEC	Safety class I

Initial Performance (IEC Compliant)

Initial chromaticity	(0.38, 0.38) SDCM <3
Luminous flux tolerance	+/-10%
Power consumption tolerance	+/-10%


Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life	5 %
50000 h	
Control gear failure rate at median useful life	0.1 %
100000 h	
Lumen maintenance at median useful life*	L85
50000 h	
Lumen maintenance at median useful life*	L75
100000 h	

Product Data

Full product code	871951410775500
Order product name	LL217X 80S/840 1x PSD WB 7x1.5
Order code	910925867518
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910925867518
Full product name	LL217X 80S/840 1x PSD WB 7x1.5
EAN/UPC - Case	8719514107755

Dimensional drawing

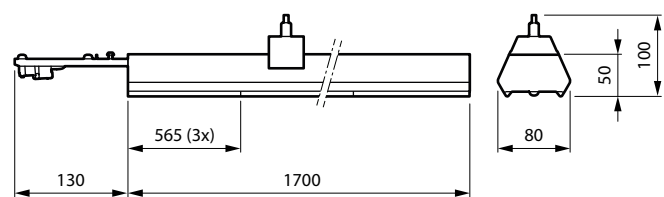

CoreLine Trunking Gen2

