



# Maxos fusion

## LL523X LED123S/840 SIA WB 7 WH HE

Maxos fusion Panel, 840 neutral white, Power supply unit with DALI interface, Wide beam, White

Maxos fusion is an adaptable LED trunking system that offers an excellent quality of light while more than halving energy costs compared to fluorescent lamps. For retail applications, a family of linear panels, non-linear modules and a spot portfolio can be smoothly integrated into the track backbone to let your merchandise sparkle and stand out. For industrial applications, the focus is on reducing installation and maintenance cost by using fewer linear panels. With the electrical set-up of up to 13 wires, the freedom to position these fixtures as required and the integration of other services/third-party hardware, the system allows you to reduce ceiling clutter. It can also be easily re-configured to accommodate future lay-out changes. The infrastructure is enabled to integrate sensors for data collection, giving you the opportunity to use insightful granular information to support your business.

### Product data

General Information		Application Conditions	
Light source replaceable	No	ENEC mark	ENEC mark
CE mark	Yes	EU RoHS compliant	Yes
Number of gear units	1 unit	Value ladder	Specification
Driver included	Yes		
Flammability mark	For mounting on normally flammable surfaces	Maximum dim level	1%
Glow-wire test	Temperature 850 °C, duration 30 s	Performance ambient temperature Tq	25 °C
Warranty period	5 years	Suitable for random switching	Not applicable
Product family code	LL523X [Maxos fusion Panel]		
Connectivity	Interact Ready	Light Technical	
Lighting Technology	LED	Luminous Flux	12,300 lumen
		Correlated Color Temperature (Nom)	4000 K

# Maxos fusion

Luminous Efficacy (rated) (Nom)	171 lm/W
Color rendering index (CRI)	>80
Flickering value (PstLM)	1
Stroboscopic effect value (SVM)	0.4
Beam angle of light source	120 degree(s)
Light source color	840 neutral white
Optic type	Wide beam
Luminaire light beam spread	85° x 85°
Unified glare rating CEN	22

## Operating and Electrical

Line Frequency	50 to 60 Hz
Input Voltage	220-240 V
Inrush current	4.5 A
Inrush time	1 ms
Power Consumption	72 W
Power Factor (Fraction)	0.98
Connection	Connection unit 7-pole
Cable	-
Number of products on MCB of 16 A type B	18

## Temperature

Ambient temperature range	-20 to +35 °C
---------------------------	---------------


## Controls and Dimming

Dimmable	Yes
Driver/power unit/transformer	Power supply unit with DALI interface
Control interface	DALI
Constant light output	No

## Mechanical and Housing

Housing Material	Steel
Reflector material	-
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Steel
Housing Color	White
Optical cover/lens finish	Textured

## Dimensional drawing

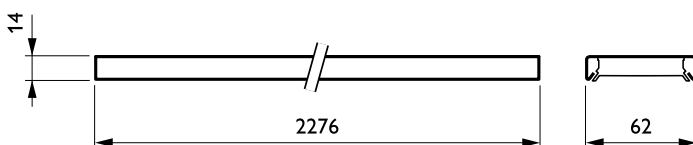

Overall length	2,276 mm
Overall width	62 mm
Overall height	14 mm
Dimensions (Height x Width x Depth)	14 x 62 x 2276 mm

## Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Sustainability rating	Lighting for circularity
Protection class IEC	Safety class I

## Initial Performance (IEC Compliant)

Initial chromaticity	(0.34, 0.35) SDCM <3
Luminous flux tolerance	+/-7%
Power consumption tolerance	+/-11%

## Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Control gear failure rate at median useful life 100000 h	10 %
Lumen maintenance at median useful life* 50000 h	L95
Lumen maintenance at median useful life* 100000 h	L85

## Product Data

Full product code	871951473777800
Order product name	LL523X LED123S/840 SIA WB 7 WH HE
Order code	910925868971
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910925868971
Full product name	LL523X LED123S/840 SIA WB 7 WH HE
EAN/UPC - Case	8719514737778

## Maxos fusion

