



LuxSpace, recessed

DN571B LED24S/830 PSU-E C WH

LuxSpace, recessed, 20 W, D200 mm, 2600 lumen, 3000 K, UGR19, High-gloss reflector, IP20

Customers are looking to optimize all their resources, and that means not just their running costs (energy, etc.) but also user costs where they see much bigger impact on return. Therefore, LuxSpace is designed to provide the perfect combination of efficiency, visual comfort and design, without compromising on lighting performance (color rendering and light distribution). It offers a wide choice of options for creating the desired ambience to support user comfort, no matter the application is. For office applications LuxSpace supports health and wellbeing having dedicated Tunable White products and lighting controls.

Product data

General Information		EU RoHS compliant	
Light source replaceable	No	Yes	
Number of gear units	1 unit	Light Technical	
Driver included	Yes	Luminous Flux	2,600 lumen
Service tag	Yes	Correlated Color Temperature (Nom)	3000 K
Product family code	DN571B [LUXSPACE 2 COMPACT DEEP]	Luminous Efficacy (rated) (Nom)	130 lm/W
Lighting Technology	LED	Color rendering index (CRI)	>80
Value ladder	Specification	Stroboscopic effect value (SVM)	0.4
CE mark	Yes	Light source color	830 warm white
Warranty period	5 years	Optic type	-
Flammability mark	For mounting on normally flammable surfaces	Luminaire light beam spread	75°
ENEC mark	ENEC mark	Unified glare rating CEN	19
Glow-wire test	Temperature 650 °C, duration 30 s	Operating and Electrical	
		Line Frequency	0/50/60 Hz

LuxSpace, recessed

Input Voltage	220 to 240 V
Inrush current	16 A
Inrush time	0.195 ms
Power Consumption	20 W
Power Factor (Fraction)	0.9
Connection	Push-in connector and pull relief
Cable	-
Number of products on MCB of 16 A type B	24

Temperature

Ambient temperature range	+10 to +25 °C
---------------------------	---------------

Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit external (On/Off)
Control interface	-
Constant light output	No

Mechanical and Housing

Housing Material	Aluminum die cast
Reflector material	Polycarbonate aluminum coated
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Steel
Housing Color	White
Optical cover/lens finish	-
Reflector Finish	High-gloss reflector
Overall height	119 mm
Overall diameter	214 mm

Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Sustainability rating	-
Protection class IEC	Safety class II

Photobiological risk	Photobiological risk group 0 @200mm to EN62778
Photobiological risk specification	0 m

Initial Performance (IEC Compliant)

Initial chromaticity	(0.43, 0.40) SDCM≤2
Luminous flux tolerance	+/-10%
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life	5 %
50000 h	
Lumen maintenance at median useful life*	L90
50000 h	
Lumen maintenance at median useful life*	L80
100000 h	


Application Conditions

Maximum dim level	Not applicable
Performance ambient temperature Tq	25 °C
Suitable for random switching	Yes

Product Data

Full product code	871869997000000
Order product name	DN571B LED24S/830 PSU-E C WH
Order code	910505100870
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910505100870
Full product name	DN571B LED24S/830 PSU-E C WH
EAN/UPC - Case	8718699970000
EAN/UPC - Product/Case	8718699970000

Dimensional drawing

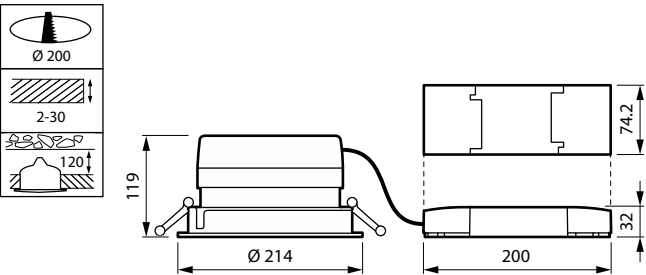

LuxSpace, recessed

