



MASTER - LED HID SON-T



MAS LED SON-T EM 6Klm 34W 740 E27

Philips MASTER - LED HID SON-T lamps are an easy LED solution with a short payback period to replace High-Intensity Discharge (HID) and High-Pressure Sodium (SON) lamps. MASTER - LED HID SON-T solutions bring the energy efficiency and long lifetime benefits of LED to HID replacement, providing instant savings for a low initial investment. With the right lamp size and light distribution, you can easily retrofit MASTER - LED HID SON-T lamps into existing SON and SON-T systems, enhancing the lighting quality with LED without changing the luminaire's ballast (for IF replacements) or reflector.

Warnings and Safety

• Please refer to the installation guide or consult a Philips Lighting representative for the wiring diagram and instructions.

Product data

General Information	
Cap-Base	E27 [E27]
Nominal lifetime	70,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Sphere
EU RoHS compliant	Yes
Light Technical	
Color Code	740 [CCT of 4000K]
Luminous Flux	6,000 lumen
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	176 lm/W

Color Consistency	<6
Color rendering index (CRI)	70
LLMF At End Of Nominal Lifetime (Nom)	70 %
Flickering value (PstLM)	1
Stroboscopic effect value (SVM)	2.5
Photobiological safety according to EN 62471	RG1
Operating and Electrical	

Operating and Electrical		
Line Frequency	50 to 60 Hz	
Input Frequency	50 to 60 Hz	
Power Consumption	34 W	
Wattage Equivalent	70 W	
Starting Time (Nom)	0.5 s	
Warm-up time to 60% light	0.5 s	


Datasheet, 2023, September 26 data subject to change

MASTER - LED HID SON-T

Power Factor (Fraction)	0.9	
Voltage (Nom)	120-240 V	
Temperature		
Ambient temperature range	-40 °C to 55 °C	
T-Case Maximum (Nom)	59 ℃	
Controls and Dimming		
Dimmable	No	
Mechanical and Housing		
Bulb Finish	Clear	
Bulb Material	Glass	
Bulb Shape	T60 [T 60mm]	
Approval and Application		
Energy Efficiency Class	С	


Energy Consumption kWh/1000 h	34 kWh
EPREL Registration Number	1077794
Product Data	
Full product code	871951444911400
Order product name	MAS LED SON-T EM 6Klm 34W 740 E27
Order code	929003468218
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929003468218
Full product name	MAS LED SON-T EM 6Klm 34W 740 E27
EAN/UPC - Case	8719514449121
EAN/UPC - Product/Case	8719514449114


Dimensional drawing




Product	D	С
MAS LED SON-T EM 6Klm 34W 740 E27	61 mm	200 mm

Photometric data






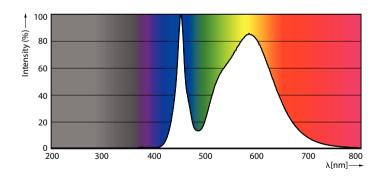

Spectral Power Distribution Colour

MASTER - LED HID SON-T


Photometric data




Calculus Pleasmentex 4.5 Philips Lighting Scv. Page: 1

General uniform lighting - MAS LED SON-T EM 6Klm 34W 740 E27

Lifetime

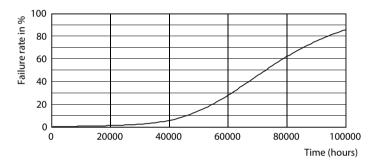



Life Expectancy Diagram - MAS LED SON-T EM 6Klm 34W 740 E27

Lumen Maintenance Diagram - MAS LED SON-T EM 6Klm 34W 740 E27



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.