



CoreLine panel

RC133V G5 36S/840 PSU W62L62 OC BN

CoreLine panel, 28.5 W, 620x620 mm, 3600 lm, 4000 K, UGR19

Philips CoreLine panel Gen5 delivers on the CoreLine promise of innovation, easy installation and excellent illumination. Designed as a direct replacement for functional luminaires in general lighting applications, this LED panel light's innovative MultiLumen feature offers a choice of three lumen packages in a single luminaire. This makes it easy to select the right product, gives you the flexibility respond to customer preferences on site, and means fewer product codes on stock. Installing this CoreLine RC132V LED panel is quick and easy too, thanks to a quick connector or Wieland connector. Interact Ready luminaires with integrated wireless communications are also available in this CoreLine range, ready to be used with Interact gateways, sensors and software.

Product data

| General Information | | Light Technical | |
|--------------------------|---|------------------------------------|-------------------|
| Light source replaceable | No | Luminous Flux | 3,600 lm |
| Number of gear units | 1 unit | Saturated Red (R9) | <50 |
| Driver included | Yes | Correlated Color Temperature (Nom) | 4000 K |
| Lighting Technology | LED | Luminous Efficacy (rated) (Nom) | 126 lm/W |
| Value ladder | Performance | Color rendering index (CRI) | ≥80 |
| CE mark | Yes | Flickering value (PstLM) | 1 |
| Warranty period | 5 years | Stroboscopic effect value (SVM) | 0.4 |
| Flammability mark | For mounting on normally flammable surfaces | Light source color | 840 neutral white |
| ENEC mark | ENEC mark | Optic type | Beam angle 90° |
| Glow-wire test | Temperature 650 °C, duration 30 s | Luminaire light beam spread | 90° |
| EU RoHS compliant | Yes | Unified glare rating CEN | 19 |
| | | Operating and Electrical | |
| | | Input Voltage | 220-240 V |

CoreLine panel

| | |
|--|--------------------------|
| Line Frequency | 50 or 60 Hz |
| Inrush current | 16 A |
| Inrush time | 0.2 ms |
| Power Consumption | 28.5 W |
| Power Factor (Fraction) | 0.9 |
| Connection | Push-in connector 3-pole |
| Cable | - |
| Number of products on MCB of 16 A type B | 21 |

Temperature

| | |
|---------------------------|---------------|
| Ambient temperature range | -10 to +35 °C |
|---------------------------|---------------|

Controls and Dimming

| | |
|-------------------------------|----------------------------|
| Dimmable | No |
| Driver/power unit/transformer | Power supply unit (On/Off) |
| Control interface | - |
| Constant light output | No |

Mechanical and Housing

| | |
|-------------------------------------|---------------------|
| Housing Material | Steel |
| Reflector material | Acrylate |
| Optic material | Polystyrene |
| Optical cover material | Acrylate |
| Fixation material | - |
| Housing Color | White |
| Optical cover finish | Microprismatic lens |
| Overall length | 620 mm |
| Overall width | 620 mm |
| Overall height | 35 mm |
| Dimensions (Height x Width x Depth) | 35 x 620 x 620 mm |

Approval and Application

| | |
|------------------------------|-------------------------|
| Ingress protection code | IP20 [Finger-protected] |
| Mech. impact protection code | IK02 [0.2 J standard] |
| Sustainability rating | - |

| | |
|------------------------------------|--|
| Protection class IEC | Safety class II |
| Photobiological risk | Photobiological risk group 0 @200mm to EN62778 |
| Photobiological risk specification | 0.2 m |

Initial Performance (IEC Compliant)

| | |
|-----------------------------|----------------------|
| Luminous flux tolerance | +/-10% |
| Initial chromaticity | (0.38, 0.38) SDCM ≤3 |
| Power consumption tolerance | +/-10% |

Over Time Performance (IEC Compliant)

| | |
|---|-----|
| Control gear failure rate at median useful life | 5 % |
| 50000 h | |
| Lumen maintenance at median useful life* | L90 |
| 50000 h | |
| Lumen maintenance at median useful life* | L80 |
| 100000 h | |


Application Conditions

| | |
|------------------------------------|-------|
| Performance ambient temperature Tq | 25 °C |
| Suitable for random switching | Yes |

Product Data

| | |
|---------------------------------|------------------------------------|
| Order product name | RC133V G5 36S/840 PSU W62L62 OC BN |
| Full product name | RC133V G5 36S/840 PSU W62L62 OC BN |
| Full product code | 872016950189800 |
| Order code | 911401823285 |
| Material Nr. (12NC) | 911401823285 |
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 8720169501898 |
| Numerator - Packs per outer box | 1 |
| EAN/UPC - Case | 8720169501898 |

Dimensional drawing

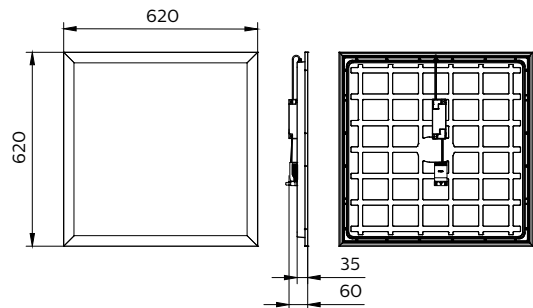

CoreLine panel

