



# OptiVision LED gen3.5

## BVP518 1720/740 BV A35-WB D9 T35 OUT LO

OptiVision LED gen3.5, Floodlight for sports and area, 1000 W, 120400 lm, 4000 K, CRI70, Asymmetrical, IP66

The Philips OptiVision LED gen3.5 floodlighting system provides a complete lighting solution for the simplest through to the most complex area and recreational sports lighting applications. The high-efficiency floodlight comes with a single piece die cast housing, hosting 2 and 3 LED engines respectively, which also function with an external driver box – separate for use at a distance from the floodlight (BV), or pre-fixed onto the mounting bracket of the floodlight (HGB) for ease of installation and lower initial cost. It meets the highest performance standards, provides outstanding light, quality, uniformity and ensures safety and visual comfort.

### Product data


General Information			
Lamp family code	LED1720 [LED module 172000 lm]	Luminous Efficacy (rated) (Nom)	119 lm/W
Number of gear units	1 unit	Color rendering index (CRI)	70
Driver included	Yes	Light source color	740 neutral white
Light source engine type	LED	Luminaire light beam spread	5° - 13° x 120°
Service tag	Yes	Optic type outdoor	Asymmetrical
Lighting Technology	LED	Effective projected area	0.373 m²
Value ladder	Specification	Operating and Electrical	
Warranty period	5 years	Input Voltage	230-400 V
Sustainability rating	Lighting for circularity	Line Frequency	50 to 60 Hz
Light Technical		Inrush current	20 A
Upward light output ratio	0	Inrush time	0.160 ms
Luminous Flux	120,400 lm	Power Consumption	1,000 W
Correlated Color Temperature (Nom)	4000 K	Power Factor (Fraction)	0.9
		Connection	Connection unit 5-pole

OptiVision LED gen3.5

Cable	-
Number of products on MCB of 16 A type B	2
Protection class IEC	Safety class I
Surge Protection (Common/Differential)	Surge protection level until 10 kV differential mode
Total harmonic distortion	16 %
Controls and Dimming	
Dimmable	Yes
Driver/power unit/transformer	Power supply unit with DALI interface
Constant light output	No
Mechanical and Housing	
Housing Material	Aluminium
Reflector material	-
Optic material	Polycarbonate
Optical cover material	Polycarbonate
Fixation material	Aluminum
Housing Color	Aluminum
Mounting device	Mounting bracket adjustable
Optical cover shape	Flat
Optical cover finish	Clear
Overall length	695 mm
Overall width	695 mm
Overall height	445 mm
Dimensions (Height x Width x Depth)	445 x 695 x 695 mm
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Standard tilt angle posttop	0°
Standard tilt angle side entry	-
Optical cover type	Polycarbonate bowl/cover clear
Net Weight (Piece)	29.000 kg
Approval and Application	
Flammability mark	-
CE mark	Yes

ENEC mark	ENEC mark
EU RoHS compliant	Yes
Performance ambient temperature Tq	25 °C
Ambient temperature range	-40 to +55 °C
Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-7%
Initial chromaticity	(0.382, 0.379) SDCM <5
Power consumption tolerance	+/-10%
Init. Color Rendering Index Tolerance	+/-2
Standard Deviation of Colour Matching (McAdam ellipse)	SDCM≤5
Over Time Performance (IEC Compliant)	
Control gear failure rate at median useful life 100000 h	5 %
Lumen maintenance at median useful life* 50000 h	-
Lumen maintenance at median useful life* 100000 h	L90
Product Data	
Order product name	BVP518 1720/740 BV A35-WB D9 T35 OUT LO
Full product name	BVP518 1720/740 BV A35-WB D9 T35 OUT LO
Full product code	872016955318700
Order code	912300060430
Material Nr. (12NC)	912300060430
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8720169553187
Numerator - Packs per outer box	1
EAN/UPC - Case	8720169553187
Product family code	BVP518 [OPTIVISION LED GEN3.5 SMALL]

Dimensional drawing

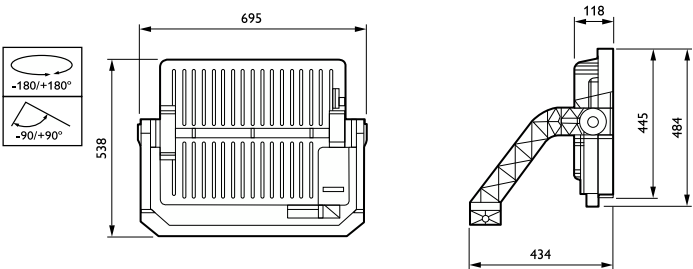

## OptiVision LED gen3.5

