

ToLEDo R7S V2 118MM 1521LM 827 SL


Item No: 0030775



ToLEDo R7s is a retrofit replacement for traditional halogen double-ended linear R7s lamps330° omni-directional light distributionHigh lumen efficacy: 133lm/WLumen output: 1521lm85% energy savingRobust constructionLength: 118mmDimmable25,000 hours average rated lifelIdeal for domestic and commercial applications

Technical Assets

Dimensions (mm)

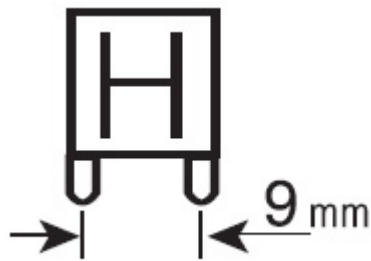

Photometrics

General data

Product name	ToLEDo R7S V2 118MM 1521LM 827 SL
Technology	LED
Lamp shape	Capsule
Cap/Base	R7s
Lamp finish	Clear
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001959
E-number FI	4741205
Warranty	3 years

Optical data

Useful luminous flux (Φuse)	1521
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	320
Photobiological Risk Group	RG1

Electrical data

Power consumption (W)	14
Wattage (W)	14
Equivalent watt (W)	100
Current (A)	0.1
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Inrush Current (A)	1.98
Inrush Duration (µs)	7100
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	15000
------------------	-------

Physical data

Housing colour	Transparent
IP rating	IP20
Nominal Product Height (mm)	118
Nominal Product Diameter (mm)	18
Weight (kg)	0.05

Packaging

Product EAN number	5410288307756
Packaging single length / height (cm)	4.9
Packaging single width (cm)	4.9
Packaging single depth (cm)	12.4
DUN14 (inner)	15410288307753
Units per outer package	6
Packaging outer length / height (cm)	15.5
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	14.0

Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures