


Uni-form Pulse Start High Performance Lamps

Description: HIT 400W/H75/PS/740


Performance Data

Rated Light Output (Lumens @ 100 hours)	40000
Lamp Lumens per Watt	100
Rated Life (Hrs @ 10Hr./Start)	26000
Correlated Colour Temperature (K)	4000
Chromaticity (CIE - X Y)	385,390
Colour Rendering Index (CRI) or (Ra)	68
Typical Warm Up Time (Minutes)	2-3
Typical Hot Restart Time (Minutes)	4-6
Burning Position	Horizontal±75°
S/P (Multiplier)	1.7
Energy Rating (ErP)	A+ 440 kWh/1000h




Physical Data

Base Designation	E40
Bulb Designation	T46
Bulb Diameter (mm)	46
Max. Overall Length (mm)	285
Light Centre Length (mm)	178
Effective Arc Length (mm)	44
Max. Base Temperature (°C)	250
Max. Bulb Temperature (°C)	400
Luminaire Type	Enclosed
Socket Pulse Rating (KV)	4.5
Mercury Content (mg)	39.0

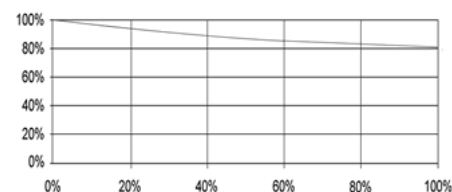

Lumen Maintenance (Light Output vs. Rated Life)

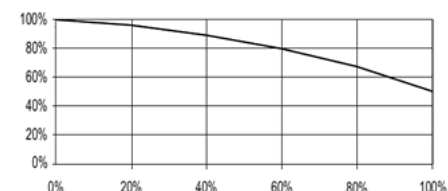

Lamp Mortality (Survivors vs. Rated Life)

Lamp Electrical Data

Nominal Lamp Wattage (W)	400
Lamp Operating Voltage (V)	135
Lamp Operating Current (A)	3.2
Min. Open Circuit Voltage (RMS)	198
Min. Starting Pulse (Peak V)	3000-4500
Min. Pulse Width (Microseconds)	1 @2700V
Min. Pulse Rate Per ½ cycle	1
Pulse Position (Electrical Degrees)	60-90, 240-270

Revision: 29-08-2014

See page 2 for product notes

Uni-form Pulse Start High Performance Lamps

Notes:

Minimum Operating Temperature: -40°C

Rated life is based on operation with Ventronic® or specifically approved electronic ballasts. For operation on magnetic control gear the rated life is reduced by 30%.

This Product Specification contains data about typical performance at nominal power. Actual values may depend on ballast and applications. Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives.