
DECOSTAR 35 35 W 12 V 36° GU4

DECOSTAR 35 | Halogen dichroic reflector lamps with 35 mm diameter



Areas of application

- General illumination
- Workplace lighting
- Kitchen lighting
- Mirror lighting
- Object lighting
- Shops
- Restaurants, hotels and similar prestigious applications

Product benefits

- Brilliant accent light
- Dichroic reflector reduces the heat in the light beam by up to 66 %
- Approved for use in open luminaires (to IEC 60598-1)
- UV filter
- Contains no mercury

Product features

- Average life: 2,000 h
- 100 % dimmable
- Color rendering index R_a : 100
- Diameter: 35 mm
- Deco cover

Product datasheet

Technical data

Electrical data

Nominal wattage	35.00 W
Nominal voltage	12.0 V
Rated wattage	35.00 W
Number of switching cycles	50000
Power factor λ	1.00


Photometrical data

Nominal useful luminous flux 90°	430 lm
Luminous intensity	1000 cd
Color temperature	2900 K
Light color (designation)	Warm White
Color rendering index Ra	100
Rated useful luminous flux 90°	430 lm

Light technical data

Beam angle	36 °
Starting time	0.0 s
Warm-up time (60 %)	0.00 s

Dimensions & weight



Diameter	35.0 mm
Length	40.0 mm
Overall length	42.0 mm
Outer bulb	T9
Maximum diameter	35.0 mm

Product datasheet

Lifespan

Nominal lamp life time	2000 h
Rated lamp life time	2000 h
Lumen main.fact.at end of nom.life time	0.75

Additional product data

Base (standard designation)	GU4
Lamp mercury content	0.0 mg
Mercury-free	Yes

Capabilities

Burning position	Any
Dimmable	Yes

Certificates & standards


Energy efficiency class	B
Energy consumption	38 kWh/1000h

Country specific categorizations

ILCOS	HRGS//UB-35-12-GU4-35/36
-------	--------------------------

Product datasheet

Light Distribution

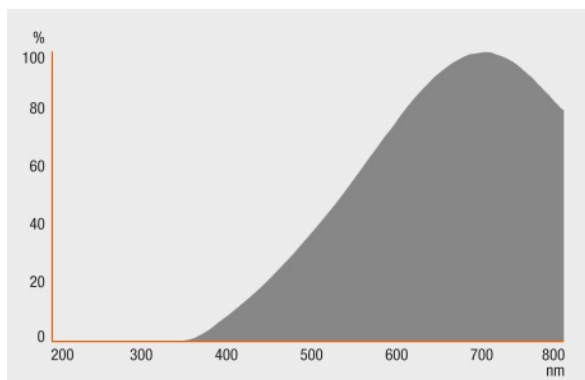

Spectral power distribution

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300346229	DECOSTAR 35 35 W 12 V 36° GU4	Shipping carton box 10	178 mm x 58 mm x 81 mm	0.84 dm ³	215.73 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For light distribution curves see

- ▶ www.osram.com

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.