

XBO 150 W/4

XBO | Xenon short-arc lamps without reflector



Product benefits

- Very high luminance (point light source)
- Continual color quality, irrespective of lamp type and lamp wattage
- Constant light color throughout the life of the lamp
- Long lamp life

Product features

- Color temperature: approx. 6,000 K (Daylight)
- High color rendering index: $R_a >$
- Continuous spectrum in the visible range
- High arc stability
- Hot restart capability
- Dimmable
- Instant light on starting



Product datasheet

Technical data

Electrical data

Nominal wattage	150.00 W
Lamp wattage	130...175 W
Lamp voltage	17...21 V ¹⁾
Lamp current	7.5 A
Type of current	DC


¹⁾ Initial voltage range

Photometrical data

Nominal luminous flux	3000 lm
Luminous intensity	300 cd ¹⁾
Luminance	15000 cd/cm ² ¹⁾

¹⁾ Typical initial photometric value

Dimensions & weight



Length	150.0 mm
Mounting length	127.0 mm
Length with base excl. base pins/connection	127.00 mm
Light center length (LCL)	57.0 mm ¹⁾
Electrode gap cold	2.5 mm
Product weight	100.00 g

¹⁾ Distance from end of base to tip of electrode (cold)

Temperatures & operating conditions


Max. permitted ambient temp. pinch point	230 °C
--	--------

Lifespan

Product datasheet

Lifespan	1200 h
-----------------	--------

Additional product data

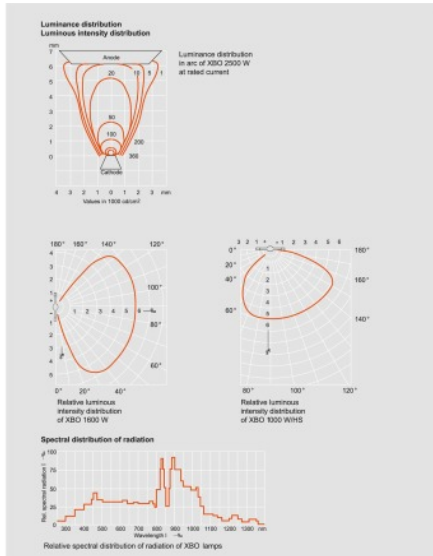

Luminous intensity distribution

Base anode (standard designation)	SFc12-4
Base cathode (standard designation)	SFcX12-4
Product remark	Lamp uses a special quality of quartz glass, known as SUPRASIL, which – in comparison to conventional quartz – provides higher transmission below 250 nm

Capabilities

Cooling	Forced
Burning position	≤15° ¹⁾

¹⁾ Anode (+) on top


Country specific information

Product code	METEL code	SEG-No.	STK-Number	UK Org
4050300508382	OSRXBO1504	-	-	-

Product datasheet

Safety advice

Because of their high luminance, UV radiation and high internal pressure in both the hot and cold state, XBO lamps must only be operated in appropriate enclosed casings. Always use the protective jackets supplied when handling these lamps. They may only be used as open lamps if appropriate safety measures are taken. More information is available on request or can be found in the leaflet included with the lamp or the operating instructions.



Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300508382	XBO 150 W/4	Folding carton box 1	245 mm x 59 mm x 100 mm	1.45 dm ³	162.00 g
4050300508399	XBO 150 W/4	Shipping carton box 10	259 mm x 315 mm x 216 mm	17.62 dm ³	1726.50 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

Further technical information on XBO lamps and information for manufacturers of operating equipment can be requested directly from OSRAM.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.